




AnyBODY™ Conduit Bodies

Copper-free aluminum die-cast. Five conduit bodies in one! Ships as an LB, but converts to a T, LL, LR, or C. Switch covers and threaded flanges as needed to create the style you need.



930 ships as LB



Converts to a...



C



LL



LR



T


Combination threaded IMC or rigid and set-screw EMT.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
930	17900	1/2	4.80	10	10	5.111	2.520	1.670
931	17901	3/4	7.80	10	10	5.640	2.770	2.020
932	17902	1	11.50	5	5	6.530	3.280	2.160
933	17903	1-1/4	32.30	2	10	8.550	4.020	2.980
934	17904	1-1/2	32.30	2	10	8.550	4.020	2.980
935	17905	2	69.50	1	5	10.730	4.670	3.500

Refer to page H-2 for flange illustration.
PATENT PENDING.



E48106 LR49636

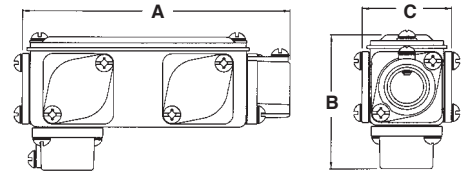

Threaded only for IMC or rigid.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
936	17906	2-1/2	175.50	1	1	13.900	5.970	4.800
937	17907	3	175.50	1	1	14.340	6.400	4.800
938	17908	3-1/2	334.00	1	1	16.840	7.330	5.840
939	17909	4	334.00	1	1	16.840	7.330	5.840

PATENT PENDING.



E48106 LR49636

COMPETITIVELY PRICED WITH LBS & NO EXTRA COST FOR TS

930 1/2" AnyBODY Showing Conversion to LR

Labels: Threaded Flange, Cover Plate, Screwdriver


1. Remove cover plate.
2. Remove threaded flange.
3. Reinstall cover plate and flange in the appropriate opening to convert AnyBODY to the desired configuration.

Features and Benefits

- Meets NEC 2008 Section 314.16 Paragraph (C) (2) for Conduit Bodies with Splices, Taps, or Devices
- Convenient and easy to use
- Saves the time, space, and cost of stocking five different conduit bodies (LB, T, LL, LR, C)
- 1/2" to 2" sizes are combination EMT/rigid — they're threaded for rigid, but also have a set-screw for use with EMT
- Includes threaded flanges for three openings
- Volume and wire fill marked inside bodies
- Recessed O-rings under covers and flanges



Recessed O-Ring Illustration

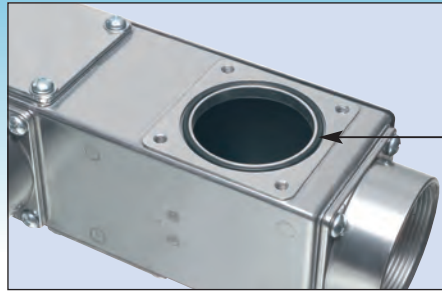

(Note: cover removed)
Seated O-rings on all Metallic AnyBODY™ Conduit Bodies maintain liquid-tight seal!


Flange Illustration

Combination Threaded and Set-Screw Conduit Bodies

AnyBODY™ conduit bodies, #'s 930 through 935, whether in T, LB, C, LR, or LL configurations have combination flanges which are threaded for rigid and include set-screws for EMT. The set-screws may be used for rigid, but are not necessary. They are listed raintight with rigid and concrete-tight for EMT. These products can also be used for EMT to rigid.



Shown with Rigid



Shown with EMT

AnyBODY™ Cover and Gasket Kits


Replacement kits for the AnyBODY Series. Includes aluminum cover, neoprene gasket, and two combination screws.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	UNIT PKG	STD PKG	DIM A	DIM B
930CG	16500	1/2	1	1	4.140	1.380
931CG	16501	3/4	1	1	4.600	1.720
932CG	16502	1	1	1	5.250	1.860
933CG	16503	1-1/4	1	1	7.200	2.600
934CG	16504	1-1/2	1	1	7.200	2.600
935CG	16505	2	1	1	9.440	3.130
936CG	93605	2-1/2	1	1	12.50	4.360
937CG	93705	3	1	1	12.500	4.360
938CG	93805	3-1/2	1	1	15.000	5.400
939CG	93905	4	1	1	15.000	5.400




E48106 LR49636





Set-Screw AnyBODY™ Conduit Bodies for EMT or Rigid

Copper-free aluminum die-cast. Five conduit bodies in one! Ships as an LB, but converts to a T, LL, LR, or C. Switch covers and flanges as needed to create the style you need.



**COMPETITIVELY
PRICED WITH LBS
& NO
EXTRA COST
FOR TS**


For set-screw sizes 1/2" - 2" see page H-1.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
16	16400	2-1/2	175.50	1	1	14.340	6.390	4.800
17	16401	3	175.50	1	1	14.340	6.400	4.800
18	16402	3-1/2	334.00	1	1	16.840	7.330	5.840
19	16403	4	334.00	1	1	16.840	7.330	5.840

Refer to page H-2 for flange illustration.
PATENT PENDING.



E48106 LR49636

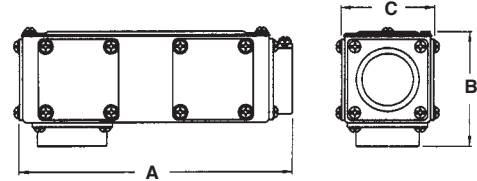

**16
2-1/2" AnyBODY
Converted from
LB to LR**

Set-screw Flange **Cover Plate**

1. Remove cover plate.
2. Remove set-screw flange.
3. Reinstall cover plate and flange in the appropriate opening to convert AnyBODY to the desired configuration.

Features and Benefits

- Meets NEC 2008 Section 314.16 Paragraph (C) (2) for Conduit Bodies with Splices, Taps, or Devices
- Convenient and easy to use
- Saves the time, space, and cost of stocking five different conduit bodies (LB, T, LL, LR, C)
- Includes flanges for three openings
- Volume and wire fill marked inside bodies
- Recessed O-rings under covers and flanges


Service Entrance SLB Conduit Bodies

With aluminum cover and velumoid gasket. Copper-free aluminum die-cast.



Threaded for IMC or rigid.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
920SLB	92013	1/2	10	10	3.155	1.450	1.178
921SLB	92113	3/4	10	10	3.470	1.650	1.360
922SLB	92213	1	5	5	4.180	1.915	1.723
923SLB	92313	1-1/4	5	5	5.515	2.320	2.164
924SLB	92413	1-1/2	2	2	6.095	2.410	2.420
925SLB	92513	2	2	10	6.595	2.975	2.835

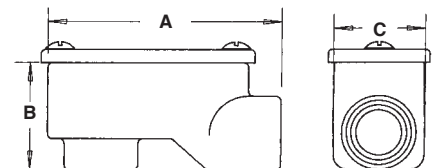




**Non-Metallic
AnyBODY™
Conduit Bodies**

Non-metallic. Five conduit bodies in one! Ships as an LB, but converts to a T, LL, LR, or C. Switch covers and flanges as needed to create the style you need. Includes cover, foam gaskets, and screws.



935NM ships as LB



Converts to a...



C



LL



LR




T

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
930NM	12500	1/2	4.50	10	10	5.150	2.560	1.750
931NM	12501	3/4	8.50	10	10	5.670	2.800	2.100
932NM	12502	1	12.00	5	5	6.560	3.260	2.240
933NM	12503	1-1/4	33.50	2	10	8.510	3.910	3.000
934NM	12504	1-1/2	33.50	2	10	8.510	3.910	3.000
935NM	12505	2	65.30	2	10	10.840	4.710	3.630
936NM	12506	2-1/2	194.00	1	1	14.440	6.470	4.980
937NM	12507	3	194.00	1	1	14.560	6.600	4.980
938NM	12508	3-1/2	369.00	1	1	17.170	7.610	6.090
939NM	12509	4	369.00	1	1	17.250	7.690	6.090

PATENT PENDING.



E170558 LR49636

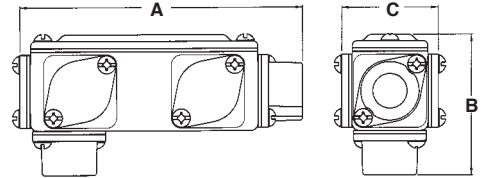

930NM shown

**935NM
2" AnyBODY
Showing
Conversion to LR**

Set-screw Flange Cover Plate

1. Remove cover plate.
2. Remove flange.
3. Reinstall cover plate and flange in the appropriate opening to convert AnyBODY to the desired configuration.

Features and Benefits

- Meets NEC 2008 Section 314.16 Paragraph (C) (2) for Conduit Bodies with Splices, Taps, or Devices
- Convenient and easy to use
- Saves the time, space, and cost of stocking five different conduit bodies (LB, T, LL, LR, C)
- Includes flanges for three openings
- Volume and wire fill marked inside bodies
- Using standard PVC cement, AnyBODY glues onto pipe for easy installation
- AnyBODY NM Cover and Gasket Kits available soon
- All gaskets are secured and maintain a liquid-tight seal

**COMPETITIVELY
PRICED WITH LBs
& NO
EXTRA COST
FOR Ts**