



Siding Box Kits

For smooth vertical mounting of fixtures and receptacles on sided structures. Paintable. UV rated plastic for long outdoor life.



8081



8081F



8082F (for 1/2" or less)



8081FC




8081FB

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	USES	UNIT PKG	STD PKG	STYLE
8081*	80812	All Types	Fixtures, Devices	25	25	w/o Flange
8081F*	80814	All Types	Fixtures, Devices	25	25	w/ Flange
8082F*	32240	1/2" or Less	Fixtures, Devices	25	25	w/ Flange
8081FC	10939	All Types	Fixtures, Devices	25	25	Cover Only
8081FB*	10941	All Types	Fixtures, Devices	25	25	Box Only

*Add suffix "GC" to Catalog # when ordering in Canada, for example 8081FGC. PATENTED. ADDITIONAL PATENTS PENDING.



E170558 LR49636

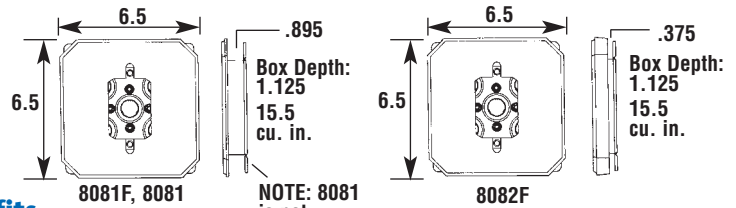


Features and Benefits

- UL Listed electrical box
- Works on all siding types – *Before* or *After* the siding is up!
- Flanges may be removed for retrofit work
- Textured, paintable surface
- NM cable connector included


For Installation Instructions 'AFTER Siding is Up' see Below. For Installation Instructions 'BEFORE Siding is Up' see Page K-2.

Installation Instructions AFTER Siding is Up... Without Flange (8081 & 8081DBL)

NOTE: 8081F, 8081FDBL, 8082F, 8091F, and 8091FDBL may also be installed when siding is already up – Score and break off flanges before step one (below).




1. Disconnect electrical power. Place box section in desired location and pencil outline onto siding.



2. Cut along pencil line with razor knife and remove vinyl siding.



3. Mount box section to substrate. Caulk as required.



4. Place siding block over box section (8081 shown).



5. Connect wires and install fixture per manufacturer's instructions.




Siding Box Kits

For smooth vertical mounting of fixtures and GFCIs on sided structures. Paintable. UV rated plastic for long outdoor life.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	USES	UNIT PKG	STD PKG	STYLE
8091F*	17856	All Types	GFCIs, Fixtures	25	25	w/ Flange
8091FC	10946	All Types	GFCIs, Fixtures	10	10	Cover Only
8091FB*	10945	All Types	GFCIs, Fixtures	10	10	Box Only

*Add suffix "GC" to Catalog # when ordering in Canada, for example 8091FGC.
PATENTED. ADDITIONAL PATENTS PENDING.

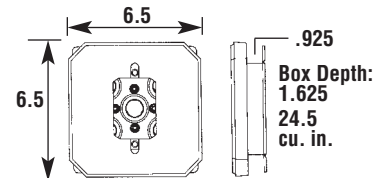

Features and Benefits

- UL Listed electrical box
- Works on all siding types – *Before* or *After* the siding is up!
- Flanges may be removed for retrofit work
- Textured, paintable surface
- NM cable connector included
- Works with fixtures and receptacles, but is deeper for use with GFCIs


For Installation Instructions 'BEFORE Siding is Up' see Below. For Installation Instructions 'AFTER Siding is Up' see Page K-1.

Installation Instructions *BEFORE* Siding is Up... With Flange (8081F, 8081FDBL, 8082F, 8091F, & 8091FDBL)



1. Before siding is installed, using the flanged style, screw the box to the wall using the holes provided in the flange.
2. Disconnect electrical power. Pull the wire through the knockout of your choice.
3. Install siding around box section and caulk as required.
4. Attach cover.
5. Connect the wires and install the fixture per manufacturer's instructions.

The All-in-One Electrical Box and Cover

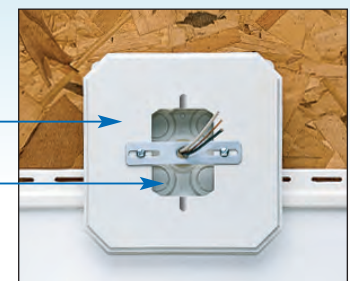

Siding block cover is placed over the electrical box.
The rectangular hole provides access to the wire connections.



Siding Box Kits

For smooth vertical mounting of large fixtures on sided structures. Paintable. UV rated plastic for long outdoor life.



8081DBL



8081FDBL

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	USES	UNIT PKG	STD PKG	STYLE
8081DBL	80813	All Types	Large Fixtures	25	25	w/o Flange
8081FDBL	80815	All Types	Large Fixtures	25	25	w/ Flange
8081FDBLC	10943	All Types	Large Fixtures	10	10	Cover Only


Add suffix "GC" to Catalog # when ordering in Canada, for example 8081DBLGC
PATENTED. ADDITIONAL PATENTS PENDING.



E170558 LR49636

Features and Benefits

- UL Listed electrical box
- Works on all siding types — *Before* or *After* the siding is up!
- Flanges may be removed for retrofit work
- Textured, paintable surface
- NM cable connector included
- Perfect for installation of large fixtures

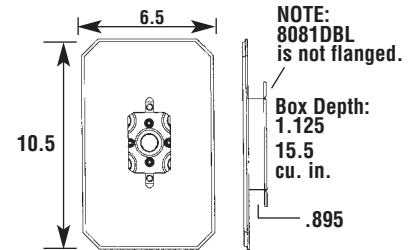

For Installation Instructions 'AFTER Siding is Up' see Page K-1. For Installation Instructions 'BEFORE Siding is Up' see Page K-2.

Siding Box Kit With MEGA

Mounting Plate

Mount the largest coach lamps on all siding types with the sturdy MEGA Mounting Plate! It's an electrical box and cover all-in-one! Paintable. UV rated plastic for long outdoor life.



Note: Canadian orders ship with grounding lug.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	USES	UNIT PKG	STD PKG	STYLE
8091FDBL	24168	All Types	GFCIs, Extra Large Fixtures	10	10	w/ Flange
8091FDBLC	10947	All Types	GFCIs, Extra Large Fixtures	10	10	Cover Only


Add suffix "GC" to Catalog # when ordering in Canada, for example 8091FDBLGC
PATENTED. ADDITIONAL PATENTS PENDING.



E170558 LR49636

Features and Benefits

- Provides a solid mount for extra large fixtures
- UL Listed electrical box
- Use up or down to fit any mounting hole configuration
- Flanges may be removed for retrofit work
- Deep design to accommodate GFCIs

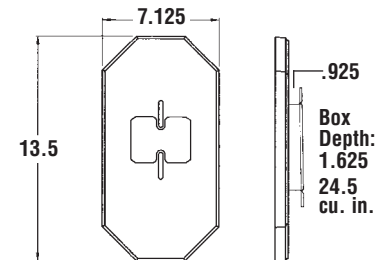

Installation Instructions

1. Disconnect electrical power. Insert provided NM cable connector through the KO of your choice and pull wires through.
2. Box section mounts to substrate. Caulk as required.
3. Place MEGA Plate over box section and install large fixture per manufacturer's instructions.





Siding Mounting Kits with Built-in Box

For smooth vertical mounting of light fixtures on all siding types. Kit includes mounting block with built-in electrical box, NM cable connector, and 4 screws. Paintable. UV rated plastic for long outdoor life.





CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
8131	08131	1/4" & 5/16"	1	10	4" Diameter x 1/2" Deep	6.625	6.625
8141	10751	1/2" Lap	1	10	4" Diameter x 1/2" Deep	6.625	6.625
8141DBL	54524	1/2" Lap Double	1	10	4" Diameter x 1/2" Deep	6.900	10.200
8151	10753	5/8" Lap	1	10	4" Diameter x 1/2" Deep	6.625	6.625
8161	08161	Flat Surfaces	1	10	4" Diameter x 1/2" Deep	6.625	6.625
8171	10757	Dutch Lap	1	10	4" Diameter x 1/2" Deep	6.625	6.625

Add suffix "GC" to Catalog # when ordering in Canada, for example 8141GC.
PATENTED. ADDITIONAL PATENTS PENDING.




E170558 LR49636

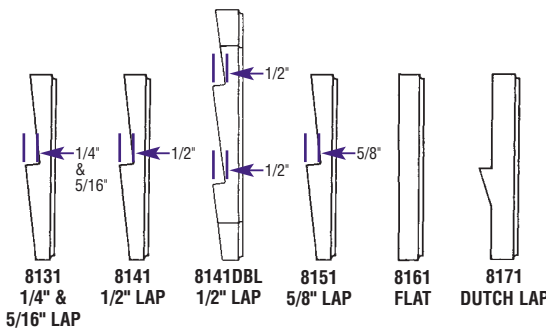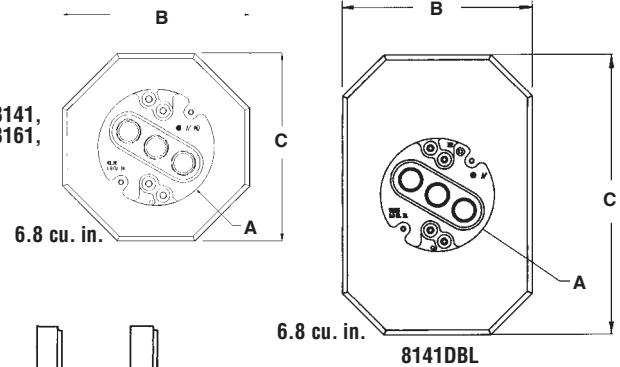

Features and Benefits

- Mounts light fixtures on all siding types, including T-111, HardiePlank® Lap Siding, and flat surfaces
- Fast and easy to install...*after* siding is up
- Textured, paintable surface
- NM cable connector included
- Built-in electrical box design ensures UL listed installation


Installation Instructions on Siding



1 Select location for light fixture and caulk opening around cable.



2 Remove knockout from electrical box and insert cable connector. Push cable through connector and position mounting block onto siding.



3 Secure mounting block with provided screws. Install fixture per manufacturer's instructions.



MEGA Siding Plate


Use the 8100LP to convert octagonal size covers to MEGA covers for mounting large fixtures or coach lamps. UV rated plastic for long outdoor life.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D	DIM E
8100LP	10749	All Types	1	10	.783	13.500	7.125	5.125	4.105

Features and Benefits

- Accommodates light fixtures with mounting brackets up to 12"
- To center fixtures, use slotted mounting screw holes to provide adjustments up to 1"
- Provides a smooth, secure mounting surface for large fixtures
- Instantly converts a previously installed octagonal siding block to a MEGA Siding Plate
- Features alignment mounting slots to guarantee the MEGA Siding Plate will stay securely in position



Installation Instructions

The 8100LP MEGA Siding Plate is designed to install directly over the existing mounting block for installations of large light fixtures. If screw holes are offset, simply rotate the 8100LP 180°.



For use with Arlington's Siding Blocks ...

- 8131 •8141 •8141DBL
- 8151 •8161 •8171

SUPER MEGA Siding Plate


Converts existing octagonal block for installation of extra large light fixtures or coach lamps. Paintable. UV rated plastic for long outdoor life.



CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
8100MLP	10752	All Types	1	10	.838	16.000	8.500

Features and Benefits

- Supports light fixtures with canopies up to 8" wide x 15-1/2" tall
- To center fixtures, use slotted mounting screw holes to provide adjustments up to 2"
- Fits over all Arlington's octagonal siding blocks and 8091F
- Provides a sturdy, extra large mounting surface



Installation Instructions

Use with an existing mounting block. Disconnect electrical power. Align slots and secure the 8100MLP to the siding block. Install extra large fixture per manufacturer's instructions. If screw holes are offset, simply rotate the 8100MLP 180°.

For use with Arlington's Siding Blocks ...

- 8091F •8131 •8141 •8141DBL
- 8151 •8161 •8171






Dryer Vent Mounting Block Kit

Non-metallic dryer vent mounting block for new construction. Kit includes a low profile, louver-type hood; a snap together 4" diameter x 11" aluminum tube; and a siding block with built-in J-channel. Color: Paintable white. UV rated plastic for long outdoor life.

New!

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
DV1	43607	All Types	1	1	7.226	7.226	1.738
*DV1JH	43615	All Types	5	5	7.226	7.226	1.738

*Installed like DV1 except cut hole to accommodate 2" vacuum pipe.



**EASY TO INSTALL...
BEFORE THE SIDING!**




DV1

Features and Benefits

- Provides a secure, attractive and time saving way to install dryer vents on new siding
- Installs *before* siding is up and fits 1/2" and 5/8" step, and dutch lap siding
- Textured, paintable surface
- Overhang covers cut ends of siding for a clean, neat look
- Easy to install – provides an attractive, flush-look mounting

DV1 Installation Instructions on Siding



1 Cut hole in substrate with a 4-1/2" diameter hole saw.



2 Insert vent tube into opening.



3 Use screws to mount dryer vent to substrate through flanges.



4 Install siding. Overhang on vent flange hides cut ends of siding.



DV1 Dryer Vent Mounting Block. The finished installation looks great!



Weatherproof FS Outlet Box

For installing devices on all siding types. Paintable. UV rated plastic for long outdoor life.




CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FS8091F	17304	All Types	10	10	4.511	6.558	2.656

Add suffix "GC" to Catalog # when ordering in Canada, for example FS8091FGC. PATENTED.



E170558 LR49636



B

A

C

19.4 cu. in.

Costs Less Than Our 8081F and 8091F Siding Boxes.

**EASY TO INSTALL...
BEFORE OR AFTER
THE SIDING!**

Features and Benefits


- Costs less...one-piece design
- For use with all single-gang devices, including GFCIs
- Installs before or after siding is installed. Remove break-away flanges for installation on previously sided structures.
- Can be installed vertically or horizontally
- For all types of siding
- Textured, paintable surface.
- UL listed

Installation Instructions

BEFORE siding is up...

1. Disconnect electrical power. Remove knockout. Insert cable connector. Pull NM cable through connector.
2. Attach outlet box to substrate with (2) screws.
3. Install device, FS8091F works with all single gang devices.

Complete installation with code required weatherproof while-in-use cover.



1



2



GFCI


3



Standard Outlet

AFTER siding is up...

1. Disconnect electrical power. Cut hole in siding.
2. Break flanges off the back of the FS8091F. Remove knockout. Insert cable connector in KO, then pull NM cable through connector.
3. Attach outlet box to substrate with (2) screws.
4. Install single gang device (standard or GFCI). Complete installation with code required weatherproof while-in-use cover.



1



2



3



Standard Outlet

4



GFCI

Note:
Canadian orders ship with grounding lug.



Siding Mounting Block

Mounting block with built-in electrical box for smooth vertical mounting of light fixtures on all siding types. Paintable. UV rated plastic for long outdoor life.



**EASY TO INSTALL...
BEFORE OR AFTER
THE SIDING!**

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
8141F	10761	All Types	10	10	6.652	6.652	4.125" Diameter x 1/2" Deep	1.126

Add suffix "GC" to Catalog # when ordering in Canada, for example 8141FGC.


PATENTED.



E170558 LR49636

Features and Benefits

- Installs before or after siding is installed. Remove break-away flanges for installation on previously sided structures.
- One-piece design
- Textured, paintable surface
- NM cable connector included

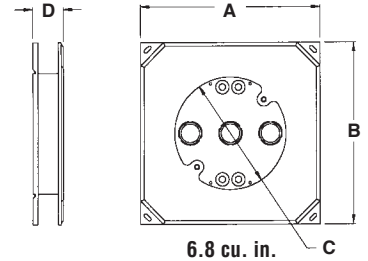

Installation Instructions

BEFORE siding is up...

1. Remove knockout from 8141F. Insert cable connector. Pull NM cable through connector.
2. Attach block to substrate with (2) screws mounted diagonally.
3. Install fixture according to manufacturer's instructions.

AFTER siding is up...

1. Cut hole in siding.
2. Break flanges off the back of the 8141F. Remove knockout. Insert cable connector in KO, then pull NM cable through connector.
3. Attach mounting block to substrate with (2) screws.
4. Install fixture according to manufacturer's instructions.

Flange Box for 1/2" or 1-1/4" Surfaces

Flanged, reversible box for two different depths. Back panel works on either end of the box for both 1/2" or 1-1/4" depths. For new construction. Use for mounting coach lights on stucco and/or flat siding.





CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
FR420F	09615	Flat	10	10	6.750	6.750	4.000	1.986

PATENT PENDING.



E170558 LR49636

Assembly Options

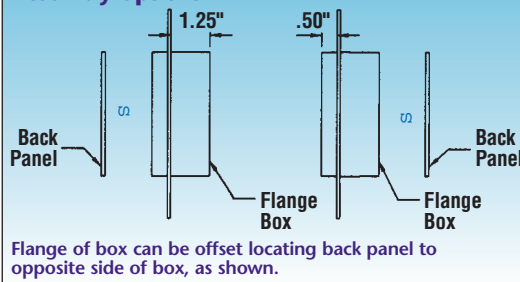


Features and Benefits

- Wall mount – one-piece design for new installations
- Up to a 10 lb. fixture rating
- Ships with 1-1/4" box depth for foam/stucco applications
- Easily converts to 1/2" box depth by removing and reinstalling back plate
- The fixed flange is large enough to eliminate the need for a separate flashing
- No gasket needed to seal box from air infiltration
- Large 20 cubic inch volume
- Made of high strength polycarbonate



Weatherproof FS Boxes

One-piece construction electrical box provides a clean, weatherproof, UL Listed installation. Deep design for GFCIs. Paintable. UV rated plastic for long outdoor life.




CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE/STYLE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FS8141	17340	1/2" Lap	25	25	5.093	3.312	2.056
FS8151	17341	5/8" Lap	25	25	5.093	3.312	2.056
FS8161	17342	Flat Surfaces	25	25	5.093	3.312	2.056
FS8171	17343	Dutch Lap	25	25	5.093	3.312	2.056

Add suffix "GC" to Catalog # when ordering in Canada, for example FS8141GC. PATENTED.



Features and Benefits

- Provides a solid, attractive, UL Listed installation
- Accommodates GFCI, switches, and outlets
- For use with all siding types...1/2", 5/8", dutch lap, and flat surfaces



Installation Instructions



Remove KO from FS Box and insert NM cable connector. Push cable through connector and position box onto siding.



Mount box to siding and install your choice of either a GFCI, Switch or Duplex receptacle.

Complete installation with code required weatherproof while-in-use cover.

Non-Metallic Fixture Box for Stone or Brick

Adjustable depth fixture box for new stone or brick. Adjusts to fit an exterior wall finish from 1-1/2" to 5" thick. Color: Paintable white face plate. Face plate is UV rated plastic for long outdoor life.



IN for Brick


CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
8141ALP	10767	1	1	6.625	10.200	6.750

Add suffix "GC" to Catalog # when ordering in Canada, for example 8141ALPGC. PATENT PENDING.




Features and Benefits

- Installation is fast and easy – it looks great too
- Versatile depth adjustment for 1-1/2" to 5" thick stone or brick exterior wall finishes
- Textured, paintable face plate
- For fixtures up to 10 lbs.
- Includes box, flange, face plate, (4) #6 x 1/2" screws, (4) #8 x 1-1/4" screws, and an NM94 cable connector.

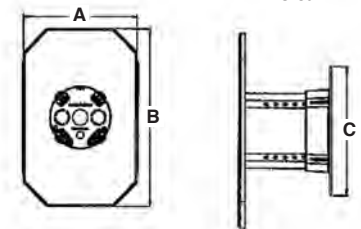

22.0 cu. in.







Meter Mounting Bases

One-piece construction.
Paintable. Gangable. UV rated plastic for long outdoor life.



MM10 mounting block also mounts disconnects, time clocks, cable TV boxes, and more!

Gangable Meter Base Combinations...

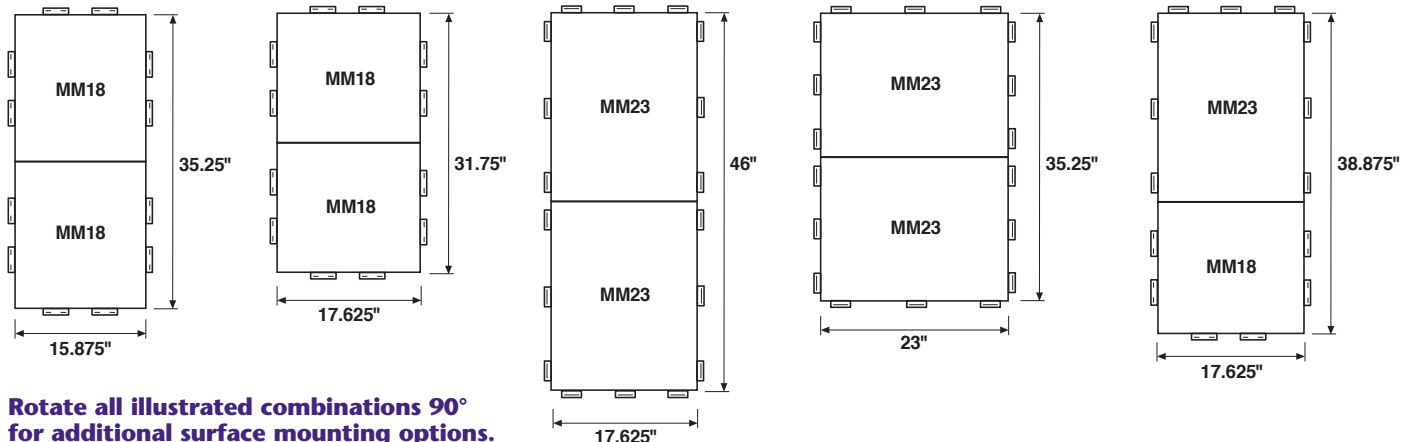

Rotate all illustrated combinations 90° for additional surface mounting options.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C	DIM D
MM10	42278	All Types	10	10	.750	1.125	10.000	7.000
MM18	42280	All Types	10	10	.750	1.125	17.625	15.875
MM23	42282	All Types	10	10	.750	1.125	23.000	17.625

PATENTED.


Installs before or after the siding is up and works with any siding type!

Installation Instructions... BEFORE siding is up

Note: For support, meter mounting nails or screws must penetrate through mounting base into substrate.




- Fasten to substrate through 'notched flanges'.
- Siding butts to edge of Meter Base, overlapping the 'notched flanges'.
- Meter Base mounting surface provides a 1" overhang to cover cut ends of siding.



Features and Benefits

- Provides a smooth, flat mounting surface
- Provides a 1" overhang to cover siding
- Gangable to accommodate most meter sizes
- Break off flanges for retrofit work

Seal joint channel with Arlington's DSC1 duct sealing compound. See page M-14.

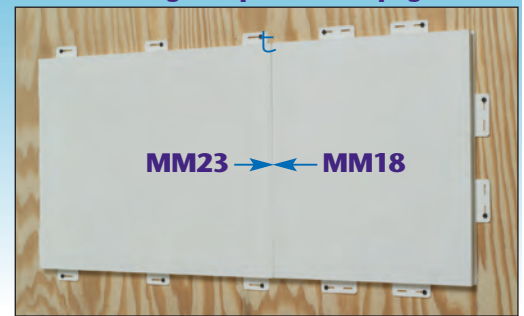



Outlet Box with Threaded Openings

Non-metallic outlet box with two threaded openings to add another outlet box later. For flat surfaces or all siding types. Paintable. UV rated plastic for long outdoor life.



FS8161T



FS8171T

Features and Benefits


- Threaded openings offer convenience when installing additional outlet boxes
- Fast and easy to install...*after* siding is up
- Textured, paintable surface
- Includes (2) 1/2" NPT plugs
- Saves time. Convenient!
- Also see our new round fixture boxes with threaded openings.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
FS8131T	00870	1/4" & 5/16" Rigid	1	10	5.562	3.720	2.100
FS8141T	00871	1/2" Lap	1	10	5.562	3.720	2.100
FS8151T	00872	5/8" Lap	1	10	5.562	3.720	2.100
FS8161T	00873	Flat Surfaces	1	10	5.562	3.720	2.100
FS8171T	00874	Dutch Lap	1	10	5.562	3.720	2.100


Add suffix "GC" to Catalog # when ordering in Canada, for example FS8131TGC.
PATENTS PENDING.



E170558 LR49636

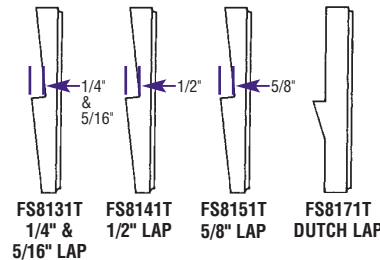

FS8161T
18.0 cu. in.



Installation Instructions on Flat Surfaces - FS8161T



1 Pull wire and attach box to flat surface.



2 Use the threaded opening(s) and PVC conduit to install additional outlet boxes.



3 Shown with Arlington's 60VW IN and OUT™ Cover (sold separately)

Add another outlet, the easy way!

Installation Instructions on Siding - 8171TR shown



1 Pull wire and attach box to siding surface.



2 Use the threaded opening(s) and PVC conduit to install additional outlet boxes.



3 Shown with Arlington's 60VW IN and OUT™ Cover (sold separately)



Siding Mounting Kits with Threaded Openings

Non-metallic fixture box with two threaded openings to add another fixture or outlet later. For flat surfaces or all siding types. Paintable. UV rated plastic for long outdoor life.



8161TR





8171TR

Features and Benefits

- Threaded openings offer convenience when adding another fixture or outlet
- Box allows for the installation of conduit horizontally or vertically
- Fast and easy to install...*after* siding is up
- Textured, paintable surface
- Includes NM cable connector, (4) screws, and (2) 1/2" NPT plugs
- Saves time. Convenient!
- Also see our new threaded opening outlet boxes


CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	SIDING TYPE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
8131TR	00875	1/4" & 5/16" Rigid	1	10	3.937 Diameter x 1.203 Deep	6.720	6.719
8141TR	00876	1/2" Lap	1	10	3.937 Diameter x 1.203 Deep	6.720	6.719
8151TR	00877	5/8" Lap	1	10	3.937 Diameter x 1.203 Deep	6.720	6.719
8161TR	00878	Flat Surfaces	1	10	3.937 Diameter x 1.203 Deep	6.720	6.719
8171TR	00879	Dutch Lap	1	10	3.937 Diameter x 1.203 Deep	6.720	6.719

Add suffix "GC" to Catalog # when ordering in Canada, for example 8131TRGC.
PATENTS PENDING.

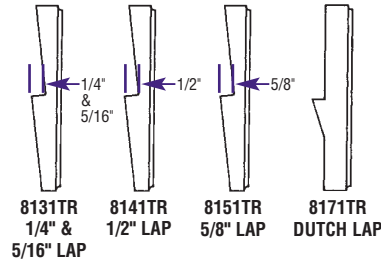

8161TR
11.5 cu. in.

Installation Instructions on Flat Surfaces - 8161TR



1 Pull wire and attach box to flat surface. Use threaded opening(s) and PVC conduit to install additional fixture(s).




2 Install fixture(s) (per manufacturer's instructions).



Perfect for adding security or flood lights.

Add another fixture or outlet box, the easy way!

Installation Instructions on Siding - 8171TR shown



1 Pull wire and attach box to siding surface.



2 Use threaded opening(s) and PVC conduit to install additional fixture(s). Install fixture(s) (per manufacturer's instructions).



Shown with our new threaded opening outlet box, **FS8171T**.