























































## DRI-BOX® Adapters with Non-Metallic Cover and Base

This adapter will accept any wiring device and standard size wall plate. Colors: clear and textured/paintable white. UV rated plastic for long outdoor life.



DBPV1C

**DBPV1/DBPV1C:**  
VERTICAL MOUNT, SINGLE GANG

**DBPH1/DBPH1C:**  
HORIZONTAL MOUNT, SINGLE GANG

**DBP2/DBP2C/DBP21D/DBP21DC:**  
VERTICAL MOUNT, TWO GANG


CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	COLOR	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
DBPV1*	17852	White	1	4	6.313	3.375	2.940
DBPV1C*	17840	Clear	1	4	6.313	3.375	2.940
DBPH1*	17853	White	1	4	4.000	5.685	2.940
DBPH1C*	17845	Clear	1	4	4.000	5.685	2.940
DBP2	17855	White	1	4	6.313	5.250	2.940
DBP2C	17857	Clear	1	4	6.313	5.250	2.940
DBP21D	17849	White	1	4	6.313	5.250	4.175
DBP21DC	17848	Clear	1	4	6.313	5.250	4.175

\*Includes (1) standard duplex and (1) GFCI face plate.  
PATENTED. ADDITIONAL PATENTS PENDING.



E170558 LR49636


**WEATHERPROOF-IN-USE**

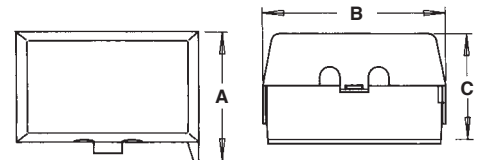

### Installation Instructions

Remove the cover by expanding ear tabs over the pivot pins. To replace the cover, simply snap over the pivot pins.

**NOTE:** It is not required to remove the cover for installation.

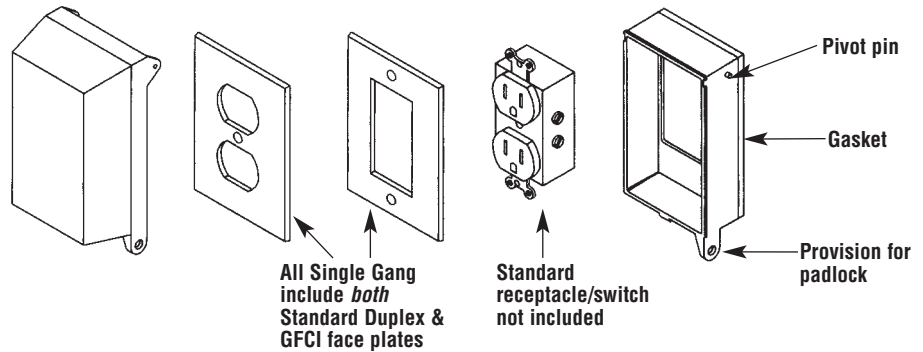

Arlington's DRI-BOX® Adapter comes with both standard duplex and GFCI plates for added convenience, but works with any standard plastic or metal wall plate. Our DRI-BOX® meets OSHA lockout/tagout requirements using a standard padlock.

**Note:** Meets 2008 NEC Section 406-8; for the protection of exterior outlets which require the use of a weatherproof while-in-use cover for all outdoor 15 or 20 AMP receptacles.