



GENERAL PURPOSE SINGLE PHASE

For commercial and industrial applications such as pumps, fans, blowers, conveyors and tools.

HP – 1/12 through 10 HP

RPM – 3600, 1800, 1200, 900
(Some Two Speed Ratings Available)

Voltage – Operable on 115V, 208V or
230V 60HZ

Construction – Rolled Steel Frame

Bearings – Ball or Sleeve Bearings

Ambient – 40°C Rated

Thermal Overload –

- Automatic Reset Thermal Overload Protector
- Manual Reset Thermal Overload Protector
- Non-Protected

Agency – UL[®] Recognized and CSA[®] Certified

† All marks shown within this document are properties of their respective owners.




EXTENSIVE LINE OF GENERAL PURPOSE SINGLE PHASE MOTORS



**Open Dripproof
Split Phase**



**Totally Enclosed Fan Cooled
Split Phase**

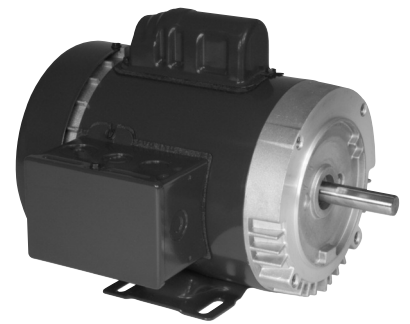

**Totally Enclosed Fan Cooled
C-Face**