



# HEATING & AIR CONDITIONING

For use in condensing units, furnaces, evaporative coolers, commercial package equipment and conditioned air systems.

**HP** – 1/10 through 2 hp

**Phase** – Single and Three Phase

**RPM** – 825, 1075, 1625 or 3450

**Voltage** – 115, 208-230, 460 or 575V  
60 HZ; some motors are rated 50/60 Hz

**Efficiency** – Standard and Premium

**Enclosure** –

- Open Dripproof (ODP)
- Totally Enclosed Air Over (TEAO)

**Mounting** – Extended Stud or Resilient Rings. Also many have mounting hardware or shell holes. Other hardware available in accessory section.



**Bearings** – Sleeve or Ball available

**Lubrication** – Permanent on most units

**Temp Rise** – Class A or B as noted


**Thermal Overload** – Internal automatic thermal overloads unless otherwise noted

**Agency** – UL<sup>®</sup> Recognized and CSA<sup>®</sup> Certified

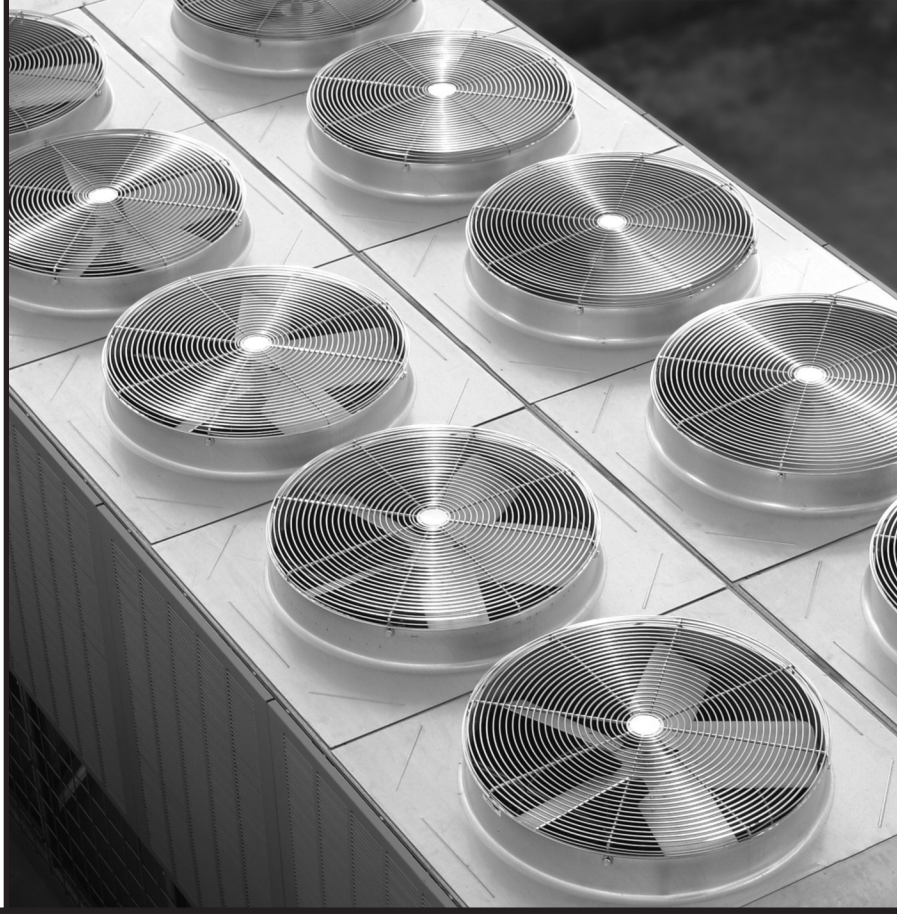

**MOJAVE™** see page 145

- Mojave 70° High Ambient Design
- Totally Enclosed Air-Over Design for all angle mounting



**RESCUE®** see page 136

- True Drop-in Replacement for conventional PSC Direct Drive Blower Motors
- Up to 82% efficient versus standard PSC motors which are 60-65% efficient



**VariTough** see page 150

- For use with variable frequency drives
- Thermostat Overload Protection

† All marks shown within this document are properties of their respective owners.