

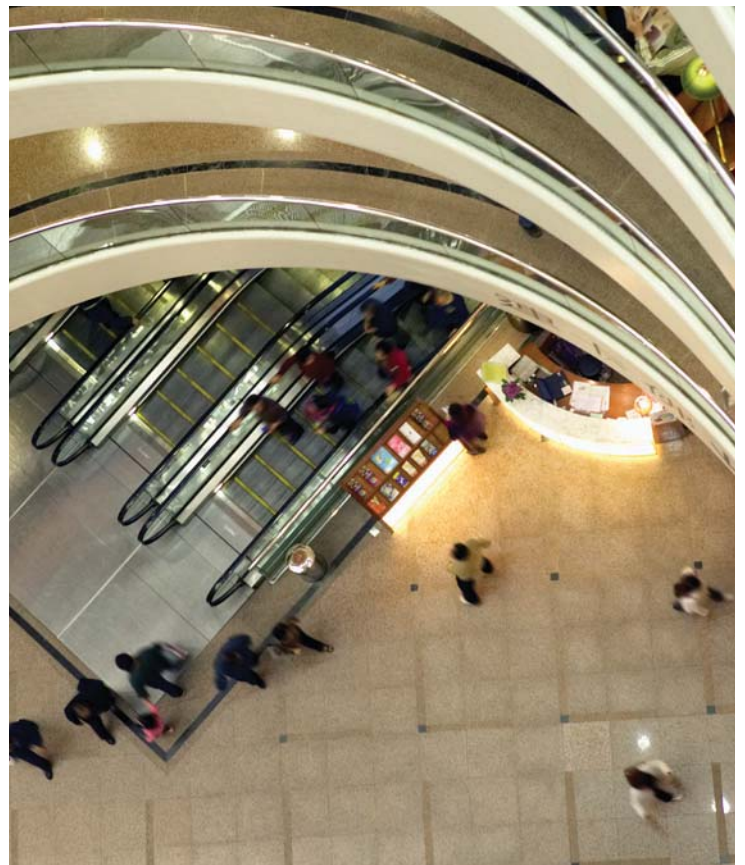
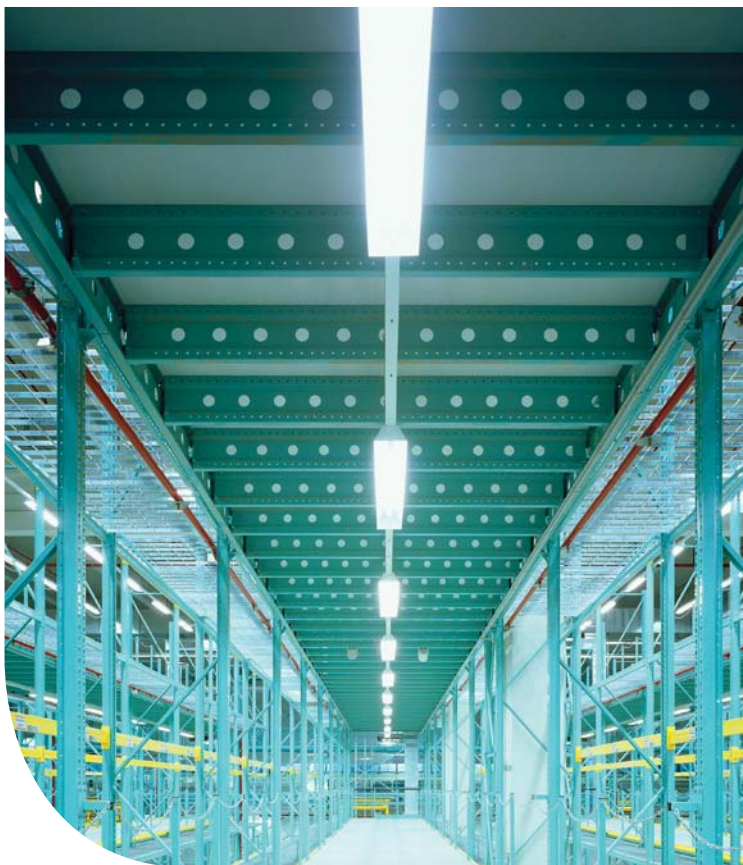


Smart Products. Ingenious Solutions.

Wiring Devices, Energy Management
Solutions and Commercial Data
Infrastructure Products

L-200

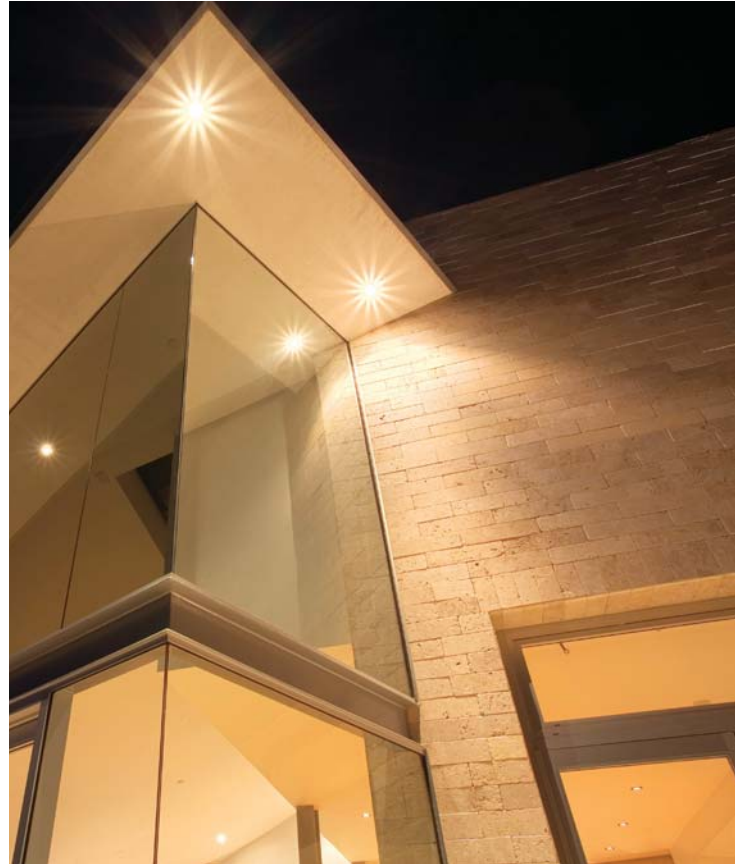

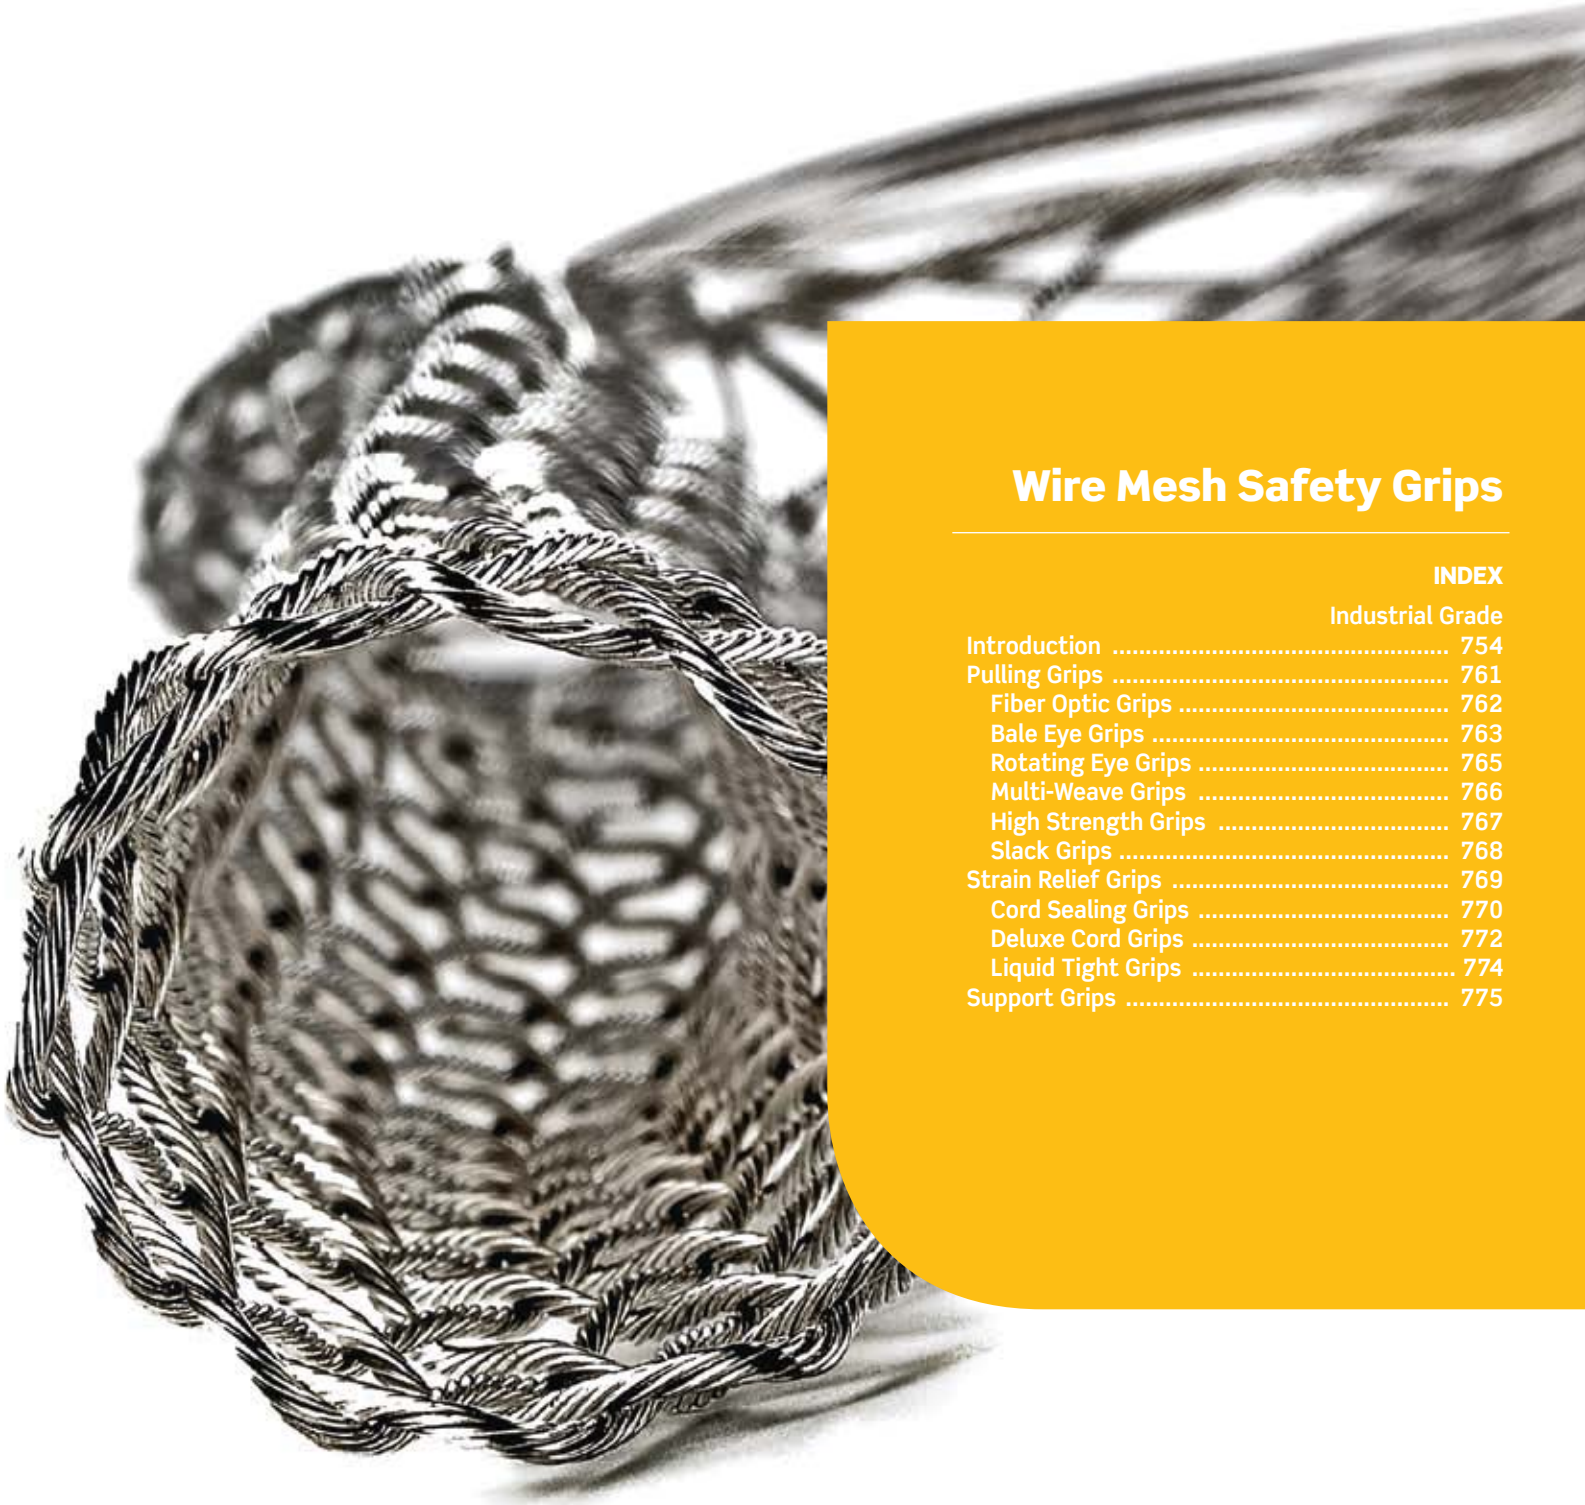

Wire Mesh Safety Grips

	INDEX
	Industrial Grade
Introduction	754
Pulling Grips	761
Fiber Optic Grips	762
Bale Eye Grips	763
Rotating Eye Grips	765
Multi-Weave Grips	766
High Strength Grips	767
Slack Grips	768
Strain Relief Grips	769
Cord Sealing Grips	770
Deluxe Cord Grips	772
Liquid Tight Grips	774
Support Grips	775

Industrial Grade

A large selection of wire mesh pulling, strain-relief and support grips

Leviton® Wire Mesh Safety Grips are built tough to provide the strength, reliability and gripping force required for today's demanding wire management applications. They are designed to distribute stress over a large area so they can securely hold, pull or support the wire, rope, tubing or fiber optic cable to which they are applied.

Leviton Wire Mesh Safety Grips are flexible holding devices used to pull cable, rope, or tubing into place; to support it after it has been installed, to prevent cable pullout; or to provide strain-relief that reduces the arc of bend at points of wire connections or terminations. Available in a wide selection of style, weave, attachment and wire options designed to meet the highest standards for strength, flexibility, durability and longevity.

Features and Benefits

Pulling Grips

Pulling Grips are reusable tools for pulling insulated conductors or bare wires, cable, nylon and wire rope, fiber optic cable etc. Both flexible eye and rotating eye attachments are available.

Strain-Relief Grips

Strain-Relief Grips are used to connect cable or flexible conduit to electrical enclosures and equipment. This prevents pullout and bending due to tension at the inner conductors at the point of termination.

Support Grips

Support Grips distribute the weight of the vertical or sloping runs of electrical and fiber optic cable, metal rods, tubing or hose over the entire length of the grip so that the cable is not subject to damage. A variety of hangers and bales are available. These grips are also available in stainless steel for additional corrosion-resistance.

Technical Reference

HAZARDOUS LOCATIONS

The following product categories are suitable for use in hazardous locations per Class I, Div. 2; Class II, Div. 1 & 2; and Class III, Div. 1 & 2 requirements.

Product Category	Type
Deluxe Cord Grips	Aluminum fitting
	Nylon fitting
	Non-metallic

FLAMMABILITY

Non-metallic Deluxe Cord Grips will not support combustion. The ratings are listed below.

Component	Rating
Wire Mesh Grip	94HB ¹
Fitting	94V ²

¹A test method used by UL to determine a rate of burning and/or extent and time of burning of self-supporting plastics in a horizontal position (ASTM D 635-88, IEC 707-1981, ISO/DIS 1210.2).

²A test method used by UL for measuring the comparative extinguishing characteristics of solid plastics in a vertical position (IEC 707-1981, ISO/DIS 1210.2).

WET LOCATIONS

The strain-relief grips listed below are suitable for use in wet locations so long as a listed sealing ring is used between the box and the fitting (not included).

Product Category	Type
Deluxe Cord Grip	Aluminum fitting
	Nylon fitting
	Non-metallic

TYPES OF WIRE MESH SAFETY GRIPS

Product Group	Description	Material
Pulling Grips	Junior Duty	Galvanized steel wire
	Light Duty	Galvanized steel wire
	Medium Duty	Galvanized steel wire
	Heavy Duty	Galvanized steel wire
	Heavy Duty Swivel	Galvanized steel wire
	Multi-Weave, Rotating Eye	Galvanized steel wire
	Multi-Weave, Flexible Eye	Galvanized steel wire
	High Strength	Galvanized steel wire
	Slack, Offset Eye - Closed Mesh	Galvanized steel wire
	Slack, Offset Eye - Split Lace	Galvanized steel wire
	Slack, Offset Eye - Split Rod	Galvanized steel wire
Strain-Relief Grips	Wide Range (with Gasket)	Galvanized steel wire
	Nylon Cord Sealing Grips with Mesh	Nylon
	Deluxe Cord Grips	Stainless steel wire
	Liquid-Tight (metallic cond.)	Stainless steel wire
	Liquid-tight (Non-Metallic Cond.)	Stainless steel wire
	Connection Wire	Galvanized steel
Support Grips	Support Closed	Tinned bronze or stainless steel ¹
	Support Closed, Heavy Duty, Long	Tinned bronze or stainless steel ¹
	Support Split with Lace	Tinned bronze or stainless steel ¹
	Support Split Lace, Heavy Duty, Long	Tinned bronze or stainless steel ¹
	Support Split with Rod	Tinned bronze or stainless steel ¹
	Bus Drop Grips	Galvanized steel wire
	Safety Springs	Spring steel

¹Stainless steel available on request. Contact your Leviton Representative.


TESTING AND CODE COMPLIANCE

- UL Listed (Control #965U, File #E-173944, and Control #16G5, File # E-176347)
- CSA Certified (File #LR-702185)

STANDARDS

- NEC 300-19—Supporting cables in vertical raceways
- NEC 351-2—Liquid-tight flexible metal conduit installations
- NEC 400-7—Flexible cord installations
- NEC 400-10—Strain-relief at joints and terminals
- JIC H 13.11—Prevention of flexible hose failure

Industrial Grade



Selecting Proper Sized Pulling and Support Grips

How to Select Proper Grip Size

Example: For five cables bundled together, each with a diameter of 0.42”:

- 1) Locate “5 Cables” column
- 2) Read down column to range (0.38”-0.48”)
- 3) Read across line to Grip Diameter Range (1.00-1.25)

Grip size is based on the outside diameter or circumference of the cable(s). Use Selection Table 1 to determine the Grip Diameter Range for one or more cables of equal diameter. Use Selection Table 2 to determine the Grip Diameter Range for cables of different diameters bundled together. (Note: In this case, the bundle must be measured.) For your convenience, the Reference Tables provide approximate values for flexible cord and AWG or MCM wire.

Grip Selection Table for One or More Cables of Equal Diameter

- 1) Read across top line for number of cables in one grip
- 2) Read down for diameter of each cable
- 3) Read across line to Grip Diameter Range column


TABLE 1: DECIMAL AND FRACTIONAL INCH CABLE DIAMETERS — FOR ONE OR MORE CABLES OF EQUAL DIAMETER

1 Cable	2 Cables	3 Cables	4 Cables	Grip Diameter Range				
0.25-0.37	$1/4$ - $3/8$	0.16-0.25	$1/64$ - $1/4$	0.15-0.22	$5/32$ - $7/32$	0.12-0.20	$1/8$ - $13/64$.250-.375
0.37-0.50	$3/8$ - $1/2$	0.25-0.36	$1/4$ - $23/64$	0.22-0.33	$7/32$ - $21/64$	0.20-0.28	$13/64$ - $9/32$.375-0.50
0.50-0.62	$1/2$ - $5/8$	0.27-0.36	$17/64$ - $23/64$	0.26-0.33	$17/64$ - $21/64$	0.24-0.28	$15/64$ - $9/32$	0.50-0.75
0.62-0.75	$5/8$ - $3/4$	0.36-0.45	$23/64$ - $29/64$	0.33-0.36	$21/64$ - $23/64$	0.28-0.31	$9/32$ - $5/16$	0.62-0.75
0.75-1.00	$3/4$ -1	0.45-0.60	$29/64$ - $39/64$	0.36-0.49	$23/64$ - $31/64$	0.31-0.42	$5/16$ - $27/64$	0.75-1.00
1.00-1.25	1 - $1 1/4$	0.60-0.76	$39/64$ - $49/64$	0.49-0.63	$31/64$ - $5/8$	0.42-0.54	$27/64$ - $35/64$	1.00-1.25
1.25-1.50	$1 1/4$ - $1 1/2$	0.76-0.91	$49/64$ - $29/32$	0.63-0.76	$5/8$ - $49/64$	0.54-0.65	$35/64$ - $21/32$	1.25-1.50
1.50-1.75	$1 1/2$ - $1 3/4$	0.91-1.08	$29/32$ - $1 5/64$	0.76-0.89	$49/64$ - $57/64$	0.65-0.77	$21/32$ - $49/64$	1.50-1.75
1.75-2.00	$1 3/4$ -2	1.08-1.23	$1 5/64$ - $1 5/64$	0.89-1.02	$57/64$ - $1 1/64$	0.77-0.88	$49/64$ - $7/8$	1.75-2.00
2.00-2.50	2- $2 1/2$	1.23-1.54	$1 5/64$ - $1 35/64$	1.02-1.28	$1 1/64$ - $1 9/32$	0.88-1.00	$7/8$ -1	2.00-2.50
2.50-3.00	$2 1/2$ -3	1.54-1.84	$1 35/64$ - $1 27/32$	1.28-1.53	$1 9/32$ - $1 17/32$	1.10-1.32	$1 3/32$ - $1 21/64$	2.50-3.00
3.00-3.50	3- $3 1/2$	1.84-2.15	$1 27/32$ - $2 5/32$	1.53-1.79	$1 17/32$ - $1 51/64$	1.32-1.54	$1 21/64$ - $1 35/64$	3.00-3.50
3.50-4.00	$3 1/2$ -4	2.15-2.45	$2 5/32$ - $2 29/64$	1.79-2.05	$1 51/64$ - $2 3/64$	1.54-1.76	$1 35/64$ - $1 49/64$	3.50-4.00

TABLE 1: DECIMAL AND FRACTIONAL INCH CABLE DIAMETERS — FOR ONE OR MORE CABLES OF EQUAL DIAMETER

5 Cables	6 & 7 Cables	8 Cables	9 Cables	Grip Diameter Range
0.11-0.14 $\frac{7}{64}$ - $\frac{9}{64}$	0.10-0.11 $\frac{3}{32}$ - $\frac{7}{64}$	0.09-0.10 $\frac{3}{32}$ - $\frac{7}{64}$	0.06-0.09 $\frac{1}{16}$ - $\frac{3}{32}$.250-.375
0.14-0.25 $\frac{9}{64}$ - $\frac{1}{4}$	0.11-0.25 $\frac{7}{64}$ - $\frac{1}{4}$	0.10-0.20 $\frac{7}{64}$ - $\frac{13}{64}$	0.09-0.19 $\frac{3}{32}$ - $\frac{3}{16}$.375-0.50
0.21-0.25 $\frac{7}{32}$ - $\frac{1}{4}$	0.19-0.22 $\frac{3}{16}$ - $\frac{7}{32}$	0.17-0.20 $\frac{11}{64}$ - $\frac{13}{64}$	0.15-0.19 $\frac{5}{32}$ - $\frac{3}{16}$	0.50-0.75
0.25-0.29 $\frac{1}{4}$ - $\frac{19}{64}$	0.22-0.26 $\frac{7}{32}$ - $\frac{17}{64}$	0.20-0.23 $\frac{13}{64}$ - $\frac{15}{64}$	0.19-0.22 $\frac{3}{16}$ - $\frac{7}{32}$	0.62-0.75
0.29-0.38 $\frac{19}{64}$ - $\frac{3}{8}$	0.26-0.34 $\frac{17}{64}$ - $\frac{11}{32}$	0.23-0.31 $\frac{15}{64}$ - $\frac{5}{16}$	0.22-0.31 $\frac{7}{32}$ - $\frac{5}{16}$	0.75-1.00
0.38-0.48 $\frac{3}{8}$ - $\frac{31}{64}$	0.34-0.43 $\frac{11}{32}$ - $\frac{7}{16}$	0.31-0.39 $\frac{5}{16}$ - $\frac{25}{64}$	0.29-0.36 $\frac{19}{64}$ - $\frac{23}{64}$	1.00-1.25
0.48-0.58 $\frac{31}{64}$ - $\frac{37}{64}$	0.43-0.52 $\frac{7}{16}$ - $\frac{33}{64}$	0.39-0.46 $\frac{25}{64}$ - $\frac{15}{32}$	0.36-0.43 $\frac{23}{64}$ - $\frac{7}{16}$	1.25-1.50
0.58-0.67 $\frac{37}{64}$ - $\frac{43}{64}$	0.52-0.60 $\frac{33}{64}$ - $\frac{39}{64}$	0.46-0.54 $\frac{15}{32}$ - $\frac{35}{64}$	0.43-0.49 $\frac{7}{16}$ - $\frac{31}{64}$	1.50-1.75
0.67-0.77 $\frac{43}{64}$ - $\frac{49}{64}$	0.60-0.69 $\frac{39}{64}$ - $\frac{11}{16}$	0.54-0.62 $\frac{35}{64}$ - $\frac{5}{8}$	0.49-0.57 $\frac{31}{64}$ - $\frac{37}{64}$	1.75-2.00
0.77-0.96 $\frac{49}{64}$ - $\frac{31}{32}$	0.69-0.86 $\frac{11}{16}$ - $\frac{55}{64}$	0.62-0.77 $\frac{5}{8}$ - $\frac{49}{64}$	0.57-0.72 $\frac{37}{64}$ - $\frac{23}{32}$	2.00-2.50
0.96-1.16 $\frac{31}{32}$ - $1\frac{5}{32}$	0.86-1.03 $\frac{55}{64}$ - $1\frac{1}{32}$	0.77-0.93 $\frac{49}{64}$ - $\frac{15}{16}$	0.72-0.86 $\frac{23}{32}$ - $\frac{55}{64}$	2.50-3.00
1.16-1.35 $1\frac{5}{32}$ - $1\frac{23}{64}$	1.03-1.20 $1\frac{1}{32}$ - $1\frac{13}{64}$	0.93-1.08 $\frac{15}{16}$ - $1\frac{5}{64}$	0.86-1.00 $\frac{55}{64}$ -1	3.00-3.50
1.35-1.54 $1\frac{23}{64}$ - $1\frac{35}{64}$	1.20-1.37 $1\frac{13}{64}$ - $1\frac{3}{8}$	1.08-1.24 $1\frac{5}{64}$ - $1\frac{15}{64}$	1.00-1.14 1 - $\frac{19}{64}$	3.50-4.00

Industrial Grade



Selecting Proper Sized Pulling and Support Grips

How to Select Proper Grip Size

Example: For three different diameter cables bundled together with a measured circumference of 6.35”.

- 1) Read down Inches (Decimal) column for 6.35” (6.29-7.86 in.)
- 2) Read across line to Grip Diameter Range (2.00-2.50)

Grip Selection Table for Cables of Different Diameters

Grip Circumference Range refers to the circumference of all cables held together


- 1) Determine Grip Circumference Range by measuring circumference of bundle of cables to be held (as shown in illustration)
- 2) Read down to locate correct range
- 3) Read across line to Grip Diameter Range Column

TABLE 2: GRIP CIRCUMFERENCE RANGE—FOR CABLES OF DIFFERENT DIAMETER

Inches (Fractional)	Inches (Decimal)	Grip Diameter Range
$2^{5/32}-1^{11/64}$	0.78-1.17	.250-.375
$1^{11/64}-1^{37/64}$	1.17-1.57	.375-0.50
$1^{37/64}-1^{15/16}$	1.57-1.94	0.50-.625
$1^{15/16}-2^{3/8}$	1.94-2.37	0.62-0.75
$2^{3/8}-3^{5/32}$	2.37-3.15	0.75-1.00
$3^{5/32}-3^{15/16}$	3.15-3.94	1.00-1.25
$3^{15/16}-4^{23/32}$	3.94-4.72	1.25-1.50
$4^{23/32}-5^{33/64}$	4.72-5.51	1.50-1.75
$5^{33/64}-6^{19/64}$	5.51-6.29	1.75-2.00
$6^{19/64}-7^{55/64}$	6.29-7.86	2.00-2.50
$7^{55/64}-9^{7/16}$	7.86-9.43	2.50-3.00
$9^{7/16}-1^{11/64}$	9.43-11.01	3.00-3.50
$1^{11/64}-12^{37/64}$	11.01-12.58	3.50-4.00

REFERENCE TABLE CORD DIAMETERS

For your convenience, the following are nominal overall diameters (in inches) for flexible cord.




AT Wire Size And Type	Conductors			
	2	3	4	5
18 SO, STO	.36	.38	.41	.49
18 SJO, SJTO	.30	.32	.35	—
16 SO, STO	.39	.41	.44	.52
16 SJO, SJTO	.32	.34	.37	—
14 SO, STO	.52	.55	.59	.67
12 SO, STO	.60	.62	.68	.74
10 SO, STO	.65	.69	.74	.80
8 SO, STO	.83	.88	.99	1.08
6 SO, STO	.99	1.04	1.12	1.25

REFERENCE TABLE AWG OR MCM DIAMETERS

This table is to be used as a guide only. Sizes may vary by manufacturer.

AWG or MCM or MCM	Approx. Dia. (inches) THHN	Approx. Dia. (inches) THW
14	.105	.162
12	.122	.179
10	.153	.199
8	.201	.259
6	.257	.323
4	.328	.372
3	.356	.401
2	.388	.433
1	.450	.508
1/0	.491	.549
2/0	.537	.595
3/0	.588	.647
4/0	.646	.705
250	.716	.788
300	.771	.843
350	.822	.895
400	.869	.942
500	.955	1.03
600	1.06	1.14
700	1.13	1.21
750	1.16	1.25
1000	1.32	1.40



Industrial Grade

Selecting Proper Sized Pulling and Support Grips

Strength Information

The approximate breaking strength of any Leviton® Wire Mesh Safety Grip is based on working load information established by our engineering laboratories. In making these determinations, it is not possible to cover all applications and operating conditions. Variables such as diameter, gripping surface, number of items gripped, tension, movement, attachments, abrasion, corrosion, prior use and abuse must be assessed by the user. Greater safety factors should be utilized when the conditions of application are vague or unknown.

For specific applications where strength and holding power are important, consult Leviton's Technical Services Department. To determine the recommended working load safety factor for listed cable grips, divide the approximate breaking strength by 5 for pulling grips and by 10 for support grips. Leviton maintains a 6 Sigma Safety Factor for this recommended working load (using average break strengths obtained on new grips under lab test conditions).

Example: For pulling grips— $33,000 \div 5 = 6,600$ lbs. which is the workload factor.

Example: For support grips— $10,080 \div 10 = 1,008$ lbs. which is the workload factor.

All warranties concerning product quality or performance are based on wire mesh safety grips that are properly stored and handled by the user, and grips that are maintained and inspected at a proper frequency in keeping with their use and condition.

GRIP CABLE RANGE— FRACTION-DECIMAL-MILLIMETER CONVERSION

Inches (Fractional)	Inches (Decimal)	Metric (mm)
$1/4$ - $23/64$	0.25-0.36	6.35-9.13
$3/8$ - $31/64$	0.37-0.49	9.52-12.30
$1/2$ - $39/64$	0.50-0.61	12.70-15.48
$5/8$ - $47/64$	0.62-0.74	15.88-18.65
$3/4$ - $63/64$	0.75-0.99	19.05-25.00
1 - $1^{15}/64$	1.00-1.24	25.40-31.35
$1^{1/4}$ - $1^{31}/64$	1.25-1.49	31.75-37.70
$1^{1/2}$ - $1^{63}/64$	1.50-1.99	38.10-50.40
2 - $2^{31}/64$	2.00-2.49	50.80-63.10
$2^{1/2}$ - $2^{63}/64$	2.50-2.99	63.50-75.80
3 - $3^{31}/64$	3.00-3.49	76.20-88.50
$3^{1/2}$ - $3^{63}/64$	3.50-3.99	88.90-101.20

Pulling Grips

Leviton® Pulling Grips are reusable tools for pulling bare conductors, insulated wires, synthetic rope, wire rope, and fiber optic cable. These grips do not damage the cable, as the tension remains uniform throughout the length of the grip. The mesh responds to fit either a single cable or a bundle of cables. Leviton Pulling Grips may be used for pulling cable on overhead or underground applications, for stringing service or communication lines into factories, for pulling wire through conduit, and for underground electrical pulls. Leviton Pulling Grips are woven in galvanized steel for greater strength and longer life. Leviton also offers Pulling Kits that come in a vinyl mat with pockets that can be rolled and tied.



Bale Eye
Attachment flexes to follow line of pull with plastic tubing on bale.



Flexible Rope Eye
Bale has no plastic tubing for better flexibility.



Offset Flexible Eye
For easy attachment of the pulling line.



Rotating Eye
For use in changing wire rope in large cranes and derricks.

SINGLE WEAVE GRIPS Flexible Eye, Junior Duty®

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (inches)
L8500	0.25-0.36	1,700	5
L8501	0.37-0.49	1,700	7
L8502	0.50-0.61	1,700	8
L8503	0.62-0.74	2,800	10
L8504	0.75-0.99	4,100	10
L8505	1.00-1.24	4,100	12



L8503

Junior Duty Series Grips are indispensable tools for electricians with small job requirements. They are used to connect insulated wire bundles to pulling tape or to pull wire rope through conduit.

Flexible Eye, Junior Duty—Kit

Kit Cat. No.	Kit includes one each of Cat. No.
L8510	L8500
	L8501
	L8502
	L8503
	L8504
	L8505

Flexible Rope Eye, Light Duty, Short®

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (inches)
L8511	0.50-0.61	3,400	12
L8512	0.62-0.74	4,100	14
L8513	0.75-0.99	4,100	14
L8514	1.00-1.24	5,800	16.5
L8515	1.25-1.49	5,800	17
L8516	1.50-1.74	7,500	20
L8517	1.75-1.99	10,000	23
L8518	2.00-2.49	10,000	23
L8519	2.50-2.99	13,000	23



L8511

Light Duty Grips are the most economical pulling grips for many applications, such as industrial plant wiring, rewiring, and underground electrical pulls.

*To determine workload safety factor, divide approximate break strength by 5.

Industrial Grade

Flexible Rope Eye, Light Duty, Medium

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (inches)
L8523	0.50-0.61	3,400	16
L8524	0.62-0.74	4,100	16
L8525	0.75-0.99	4,100	20
L8526	1.00-1.24	7,500	20
L8527	1.25-1.49	7,500	22
L8528	1.50-1.99	7,500	25
L8529	2.00-2.49	10,000	26
L8530	2.50-2.9	13,000	28
L8531	3.00-3.49	16,200	30
L8532	3.50-3.99	19,400	32

Flexible Rope Eye, Light Duty, Medium—Kit

Kit Cat. No.	Kit includes one each of Cat. No.
L8540	L8525
	L8526
	L8528
	L8529

*To determine workload safety factor, divide approximate break strength by 5.


Multi-Weave Fiber Optic Grips

Fiber Optic Pulling Grips are used for installation of fiber optic communication lines. They easily install on cables and are reusable. Applications include underground, overhead, through-conduit and/or enclosure type pulls.

Leviton fiber optic pulling grips are two-in-one reusable grips: the same tool features both a flexible eye and a swivel eye. The rounded, flexible eye attaches easily to pulling lines, and allows smoother passage through tight spaces than needle-eye designs.

MULTI-WEAVE FIBER OPTIC SERIES

Flexible/Swivel Eye



L8801

Fiber Optic Grips are made to pull delicate communication and data lines that have a much smaller cable diameter.

Cat. No.	Cable Dia. Range (inches)	Approx. Break Strength*	Length (inches)		
			Bale (Dim. A)	Mesh (Dim. M)	Nose Dia.
L8801	.10-.20	1,000	4.75	9	.8
L8802	.21-.35	1,500	4.75	14	.8
L8803	.35-.48	2,200	5.00	18	.9
L8804	.42-.61	2,800	5.00	21	.9
L8805	.53-.74	3,300	5.00	24	1.2
L8806	.64-.87	4,700	5.00	27	1.2

*To determine workload safety factor, divide approximate break strength by 5.


Single/Double Weave Bale Eye Grips

This series is recommended for heavy or rugged applications, and is ideally suited for overhead and underground installations. They are offered in short, standard or long mesh lengths.

SINGLE/DOUBLE WEAVE BALE EYE SERIES

Medium Duty, Short

Cat. No.	Cable Dia. Range (inches)	Nominal Grip Size	Approx. Break Strength*	Length (inches)		Eye Size (inches)
				Bale (Dim. A)	Mesh (Dim. M)	
L8551	0.50-0.61	0.55	4,500	8	21	7/32
L8552	0.62-0.74	0.68	5,600	8	24	1/4
L8553	0.75-0.99	0.87	6,800	8	24	1/4
L8554	1.00-1.49	1.25	9,600	9	24	5/16
L8555	1.50-1.99	1.75	16,400	11	24	7/16
L8556	2.00-2.49	2.25	18,500	12	24	7/16
L8557	2.50-2.99	2.75	24,500	12	24	1/2
L8558	3.00-3.49	3.25	24,500	14	24	1/2
L8559	3.50-3.99	3.75	31,000	14	26	5/8



Medium Duty

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (inches)
L8541	0.37-0.49	2,500	12
L8542	0.50-0.74	3,400	14
L8543	0.75-0.99	5,500	18
L8544	1.00-1.24	8,100	22
L8545	1.25-1.49	8,100	24
L8546	1.50-1.99	8,100	26

Medium Duty—Kit

Kit Cat. No.	Kit includes one each of Cat. No.
L8550	L8541
	L8542
	L8543
	L8544
	L8545
	L8546



L8545

Single/Double Weave Pulling Grips are ideal for longer pull applications.

Medium Duty, Standard

Cat. No.	Cable Dia. Range (inches)	Nominal Grip Size	Approx. Break Strength*	Length (inches)		Eye Size (inches)
				Bale (Dim. A)	Mesh (Dim. M)	
L8563	0.75-0.99	0.87	6,800	9	36	1/4
L8564	1.00-1.49	1.25	9,600	9	36	5/16
L8566	2.00-2.49	2.25	18,500	12	36	7/16
L8567	2.50-2.9	2.75	24,500	12	36	1/2
L8568	3.00-3.49	3.25	24,500	14	36	1/2
L8569	3.50-3.99	3.75	31,000	14	40	5/8

*To determine workload safety factor, divide approximate break strength by 5.

Industrial Grade

Medium Duty, Standard—Kit

Kit Cat. No.	Kit includes one each of Cat. No.
L8560	L8563
	L8564
	L8566

Heavy Duty, Long

Cat. No.	Cable Dia. Range (inches)	Nominal Grip Size	Approx. Break Strength*	Mesh Dim. M (inches)
L8572	0.75-0.99	0.87	8,100	48
L8573	1.00-1.49	1.25	11,600	48
L8574	1.50-1.99	1.75	19,400	48
L8575	2.00-2.49	2.25	19,400	48
L8576	2.50-2.99	2.75	25,900	48
L8577	3.00-3.49	3.25	25,900	48
L8578	3.50-3.99	3.75	32,400	48

NOTE: See installation instructions supplied with grip for recommended swivels, links and clamps or accessories listing.
*To determine workload safety factor, divide approximate break strength by 5.


Double Weave – Rotating Eye Grips

These grips feature a double weave of galvanized steel strands for greater strength and added mesh contact with the cable. Leviton Double Weave Pulling Grips are designed to handle longer or heavier pulling jobs such as installation of underground cables, communication lines, and service lines. Double Weave Pulling Grips have a forged steel compact rotating eye which can be attached to a swivel.

DOUBLE WEAVE, ROTATING EYE SERIES

Heavy Duty, Short

Cat. No.	Cable Dia. Range (Inches)	Nominal Grip Size	Approx. Break Strength*	Length (Inches)		Eye Size (Inches)
				Bale (Dim. A)	Mesh (Dim. M)	
L8581	0.50-0.61	0.55	5,600	5	11	7/8
L8582	0.62-0.74	0.68	6,800	5	11	7/8
L8583	0.75-0.99	0.87	9,600	6	20	1
L8584	1.00-1.24	1.12	16,400	7	20	1 ³ / ₈
L8585	1.25-1.49	1.37	16,400	7	21	1 ³ / ₈
L8586	1.50-1.99	1.74	27,200	7	25	1 ⁵ / ₈
L8587	2.00-2.49	2.24	33,000	8	26	1 ⁷ / ₈
L8588	2.50-2.99	2.74	41,000	10	28	1 ⁷ / ₈
L8589	3.00-3.49	3.24	48,000	10	30	1 ⁷ / ₈
L8591	3.50-3.99	3.74	48,000	10	32	1 ⁷ / ₈
L8592	4.00-4.49	4.24	48,000	10	33	1 ⁷ / ₈



Heavy Duty, Standard

Cat. No.	Cable Dia. Range (Inches)	Nominal Grip Size	Approx. Break Strength*	Length (Inches)		Eye Size (Inches)
				Bale (Dim. A)	Mesh (Dim. M)	
L8601	0.50-0.61	0.55	5,600	5	16	7/8
L8602	0.62-0.74	0.68	6,800	5	16	7/8
L8603	0.75-0.99	0.87	9,600	6	32	1
L8604	1.00-1.49	1.12	16,400	7	33	1 ³ / ₈
L8605	1.50-1.99	1.74	16,400	7	34	1 ³ / ₈
L8606	2.00-2.49	2.24	27,200	9	36	1 ⁵ / ₈
L8607	2.50-2.99	2.74	33,000	10	38	1 ⁷ / ₈
L8608	3.00-3.49	3.24	41,000	10	39	1 ⁷ / ₈
L8609	3.50-3.99	3.74	48,000	10	41	1 ⁷ / ₈
L8611	4.00-4.49	4.24	48,000	10	42	1 ⁷ / ₈
L8612	4.50-4.99	4.74	48,000	10	58	1 ⁷ / ₈
L8613	5.00-5.99	5.49	48,000	10	60	1 ⁷ / ₈
L8614	6.00-6.99	6.49	48,000	10	66	1 ⁷ / ₈

Heavy Duty, Standard—Kit

Kit Cat. No.	Kit Includes One Each of Cat. No.
L8600	L8603
	L8604
	L8605
	L8606

NOTE: See installation instructions supplied with grip for recommended swivels, links and clamps or accessories listing.
 *To determine workload safety factor, divide approximate break strength by 5.


Industrial Grade

Multi-Weave Grips

Leviton® Multi-Weave Pulling Grips are constructed of high strength galvanized steel strands and are designed for pulling aluminum or copper bare conductor, wire rope and insulated cables. These grips are used in applications such as distribution line stringing and overhead transmission. Multi-Weave Pulling Grips are available with a flexible or rotating eye which can be attached to a swivel. The forged steel flexible eye will thread through sheaves and blocks without binding, but is not a swivel and will not turn under tension. The rotating eye can turn to relieve pulling torque when tension is relaxed.


MULTI-WEAVE SERIES

Rotating Eye



Cat. No.	Cable Dia. Range (Inches)	Nominal Grip Size	Approx. Break Strength*	Length (Inches)		Color Code	Eye Size (Inches)
				Bale (Dim. A)	Mesh (Dim. M)		
L8621	0.25-0.49	3/8	6,800	5	26	Dk. Green	7/8
L8622	0.50-0.74	5/8	10,000	6	32	Brown	1
L8623	0.75-0.99	7/8	14,400	6	41	Lt. Blue	1
L8624	1.00-1.24	1 1/8	24,600	8	52	Gold	1 3/8
L8625	1.25-1.49	1 3/8	30,600	8	56	Black	1 5/8
L8626	1.50-1.74	1 5/8	30,600	9	60	Red	1 7/8
L8627	1.75-1.99	2	48,000	10	70	Dk. Blue	1 7/8
L8628	2.00-2.49	2 1/4	48,000	10	50	Yellow	1 7/8
L8629	2.50-2.99	2 3/4	48,000	10	52	Orange	1 7/8
L8631	3.00-3.49	3 3/4	48,000	10	54	Alum.	1 7/8
L8632	3.50-3.99	3 3/4	48,000	10	56	Lt. Green	1 7/8

Flexible Eye



Cat. No.	Cable Dia. Range (Inches)	Nominal Grip Size	Approx. Break Strength*	Length (Inches)		Color Code	Eye Size (Inches)
				Bale (Dim. A)	Mesh (Dim. M)		
L8641	0.25-0.49	3/8	6,800	9	26	Dk. Green	1/4
L8642	0.50-0.74	5/8	10,000	9	32	Brown	5/16
L8643	0.75-0.99	7/8	14,400	11	41	Lt. Blue	3/8
L8644	1.00-1.24	1 1/8	24,600	12	52	Gold	1/2
L8645	1.25-1.49	1 3/8	30,600	12	56	Black	1/2
L8646	1.50-1.74	1 5/8	30,600	12	60	Red	1/2
L8647	1.75-1.99	2	48,000	15	70	Dk. Blue	5/8
L8648	2.00-2.49	2 1/4	48,000	18	50	Yellow	5/8
L8649	2.50-2.99	2 3/4	48,000	18	52	Orange	5/8
L8651	3.00-3.49	3 1/4	48,000	18	54	Alum.	5/8
L8652	3.50-3.99	3 3/4	48,000	18	56	Lt. Green	5/8

NOTE: It is recommended that a swivel be used for release of torque during a pull. Use a connecting link when a swivel is not needed. Do not run grips or swivels over bullwheels while under tension. Do not use Multi-Weave for pulling rope. When higher loads are required, use Leviton's high strength-style pulling grips. See installation instructions supplied with grip for recommended swivels, links and clamps or accessories listing.

*To determine workload safety factor, divide approximate break strength by 5.

High Strength Grips


High Strength Pulling Grips are designed for situations where load and safety considerations require an extra high strength grip. They are most commonly used for attaching pulling lines to conductors, conductors to running boards, and conductor-to-conductor connections. These grips can be used for pulling bare or insulated conductor, wire rope or synthetic rope. A feed tube is used when assembling synthetic rope¹ into the High Strength Pulling Grip and is required on the two largest grip sizes.

HIGH-STRENGTH SERIES Multi-weave Flexible Eye

Cat. No.	Grip Range		Approx. Break Strength*	Length (Inches)		Color Code	Flexible Eye Size (inches)
	O. D. (Inches) Rope 1	Conductor		Bale (Dim. A)	Mesh (Dim. M)		
L8661	0.50-0.90	0.38-0.62	14,000	13	26	Dk. Green	.375
L8660	0.25-0.65	0.19-0.37	6,500	10	24	Black	.218
L8662	0.75-1.10	0.63-0.87	20,000	14	48	Red	.437
L8663	1.00-1.50	0.88-1.12	30,600	15	60	Dk. Blue	.500
L8664	1.25-1.70	1.13-1.37	46,800	18	76	Yellow	.625
L8665	1.50-2.10	1.38-1.90	66,500	24	89	Aluminum	.750


¹For rope, select smallest size grip which meets required workload.

*To determine workload safety factor, divide approximate break strength by 5.



Recommended Rope Assembly Using High Strength Feed Tube

- 1) Insert feed tube into High Strength Pulling Grip
- 2) Insert rope end fully into feed tube
- 3) Hold rope in feed tube by pinning rope to the ground with end of tube. Pull mesh down onto feed so feed tube nose is protruding through shoulder protectors as shown
- 4) Push mesh to end of feed tube and pull feed tube through mesh. When tube is pulled, the mesh gripping action will hold rope in place
- 5) Position rope so that its end is inside the shoulder protectors. Remove slack from mesh by smoothing mesh tight to rope
- 6) Apply clamps to mesh end




Split-Lace/Split-Rod Attachments

(for use where end of cable is not accessible—applies to slack grips only)

Beginning at the end of the grip closest to the bale fitting, thread the lacing through the first two loops of the split, pulling the lace through until the ends are centered evenly. Cross the laces and thread them through the next two loops, and so on down the grip, being careful not to pull the lacing too tight. Spacing of the laced closure should be approximately the same as the mesh weave. When the end of grip is reached, twist the lacing strands tightly together, wrapping the ends of the lace around the grip, and twisting again to secure. Excess length may be cut off. Split grips with rod closing are economical, since they are quickly installed, and are reusable. Simply wrap the grip around the cable and thread the rod through the loops, using a corkscrew motion. To remove, pull the rod out, and the grip is ready for re-use.

Split-Lace



Split-Rod



Industrial Grade

Slack Grips

Slack Grips are reusable grips used for pulling slack in underground cable preparatory to final placement. They may also be used for cable removal. Slack Grips feature an offset eye for easy attachment to the pulling line.

SLACK GRIPS SERIES

Closed Mesh, Double Weave, Offset Eye, Heavy Duty, Medium



L8671

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (Inches)
L8671	0.75-0.99	3,000	13
L8672	1.00-1.24	4,200	16
L8673	1.25-1.49	5,500	17
L8674	1.50-1.74	7,400	18
L8675	1.75-1.99	11,000	19
L8676	2.00-2.49	11,000	20
L8677	2.50-2.99	11,000	21
L8678	3.00-3.49	16,000	22
L8679	3.50-3.99	16,000	23

Closed Mesh, Double Weave, Offset Eye, Heavy Duty, Long

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (Inches)
L8681	0.75-0.99	3,000	21
L8682	1.00-1.24	5,500	21
L8683	1.25-1.49	5,500	24
L8684	1.50-1.99	7,400	26
L8685	2.00-2.49	11,000	27
L8686	2.50-2.99	11,000	30
L8687	3.00-3.49	16,000	33
L8688	3.50-3.99	16,000	36

Split Lace, Double Weave, Offset Eye, Heavy Duty, Medium

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (Inches)
L8691	0.75-0.99	3,000	13
L8692	1.00-1.24	4,100	16
L8693	1.25-1.49	4,100	17
L8694	1.50-1.74	5,500	18
L8695	1.75-1.99	7,300	19
L8696	2.00-2.49	7,300	20
L8697	2.50-2.99	7,300	21
L8698	3.00-3.49	9,200	22
L8699	3.50-3.99	11,000	23



L8703

Split Lace, Double Weave, Offset Eye, Heavy Duty, Long

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (Inches)
L8701	0.75-0.99	3,000	21
L8702	1.00-1.24	4,100	21
L8703	1.25-1.49	4,100	24
L8704	1.50-1.99	5,500	25

*To determine workload safety factor, divide approximate break strength by 5.

Cat. No.	Cable Dia. Range (inches)	Approximate Break Strength*	Mesh Length (Inches)
L8705	2.00-2.49	7,300	27
L8706	2.50-2.99	7,300	30
L8707	3.00-3.49	9,200	33

Split Rod, Single Weave, Offset Eye, Heavy Duty, Medium

Cat. No.	Cable Dia. Range (Inches)	Approximate Break Strength*	Mesh Length (Inches)
L8711	0.50-0.61	1,800	7
L8712	0.62-0.74	1,900	9
L8713	0.75-0.99	3,000	11
L8714	1.00-1.24	4,100	12
L8715	1.25-1.49	5,700	14
L8716	1.50-1.74	5,800	16
L8717	1.75-1.99	7,700	17
L8718	2.00-2.49	9,300	20
L8719	2.50-2.99	11,300	21
L8721	3.00-3.49	15,100	22
L8722	3.50-3.99	15,100	25



L8711

*To determine workload safety factor, divide approximate break strength by 5.

Strain-Relief Grips

Strain-Relief Grips are used to connect cord or cable to electrical enclosures and equipment. These grips prevent pullout due to tension and limit the arc of bend at the point of entry; strain is distributed over the length of mesh rather than concentrated at one point or transferred to the internal termination.

Wide-Range Grips

Wide-Range Grips are recommended for use in the wiring of enclosures, power boxes, machine tools, and power centers. They include an insulated bushing (dust-tight).

SINGLE WEAVE GALVANIZED STEEL MESH

Cat. No.	Cable Dia. Range (Inches)	NPT Size (Inches)	Mesh Length @ Nominal Dia. (Inches)	Minimum Distance Between Grips (Inches)
L7501	0.22-0.32	1/2	4	1 1/4
L7502	0.30-0.43	1/2	4 1/2	1 1/4
L7503	0.40-0.54	1/2	5 1/2	1 1/4
L7504	0.52-0.73	3/4	5 1/2	1 1/2
L7505	0.70-0.97	1	8	1 7/8
L7506	0.94-1.25	1 1/4	9	2 3/8
L7507	1.20-1.50	1 1/2	11	2 5/8
L7508	1.40-1.75	2	13	3 1/4
L7509	1.62-2.00	2 1/2	13 1/2	3 5/8
L7511	2.00-2.45	2 1/2	13 1/2	3 5/8



L7504
Galva. Steel mesh

Industrial Grade

Cord Sealing Grips *

Cord Sealing Grips with Mesh are nylon devices used to connect electrical cables to boxes, cabinets, pushbuttons, enclosures, etc. They are liquid-tight devices that are highly resistant to impact and corrosion. Non-metallic cord sealing grips will not support combustion. The ratings are: Wire Mesh Grip-94 HB and Fitting-94V-2.

Cord Sealing Grip products are suitable for use in wet locations so long as a listed sealing ring is used between the box and the fitting (sealing ring not included).



L7521
Straight—SS mesh



L7527
90°—SS mesh



L7553
Straight—nylon mesh

NYLON CORD SEALING GRIPS WITH MESH—STRAIGHT AND 90°

Cat. No. Stainless Steel Mesh		Cat. No. Non-Metallic Mesh		Cable Dia. Range (Inches)	NPT (Form Size)
Straight	90°	Straight	90°		
L7521	—	L7522	L7524	.187-.250	1/2"
—	L7527	—	L7528	.250-.312	1/2"
—	L7532	—	L7533	.312-.375	1/2"
—	L7536	—	—	.375-.437	1/2" (F2)
L7538	L7541	L7539	L7542	.437-.500	1/2"
L7543 ¹	L7544 ¹	—	—	.500-.562	1/2"
L7545 ¹	L7546 ¹	—	—	.562-.625	1/2"
L7601	—	L7602	L7604	.187-.250	3/4"
L7605	—	—	—	.250-.375	3/4"
—	L7612	—	—	.375-.437	3/4"
—	—	—	L7551	.437-.562	3/4"
L7552	L7554	L7553	L7555	.500-.625	3/4" (F3)
L7556	—	—	L7559	.562-.687	3/4"
L7561	L7563	L7562	—	.625-.750	3/4"
L7565 ¹	L7566 ¹	—	—	.687-.812	3/4"
L7567	—	L7568	L7569	.437-.562	1"
—	L7573	—	L7574	.500-.625	1"
—	L7582	—	L7583	.625-.750	1"
L7584	—	—	L7587	.687-.812	1" (F4)
L7588	—	—	L7592	.750-.875	1"
L7597	—	—	—	.875-1.000	1"

¹Cable jacket may have to be stripped for clearance. NOTE: F2, F3 and F4 are fitting form sizes.


*Cord Sealing Grips with non-metallic mesh are UL Listed and CSA Certified. Cord Sealing Grips with stainless steel mesh are CSA Certified only.

STRAIN-RELIEF GRIPS—DIMENSIONS


Dimensions for Nylon Cord-Sealing Fittings, Straight Body

Form	NPT	A	B	C	D	E	F	G	H (Ref.)
0	1/4"	.500	.778	.370	.187	.921	.778	.687	1.25
1	3/8"	1.000	1.150	.500	.250	1.250	1.115	1.000	1.85
2	1/2"	1.000	1.300	.500	.300	1.450	1.250	1.100	2.00
3	3/4"	1.000	1.500	.550	.375	1.700	1.578	1.375	2.00
4	1"	1.000	1.850	.687	.375	1.800	1.900	1.650	2.12
5	1 1/4"	1.000	2.050	.687	.375	1.800	2.100	1.850	2.12

Form 0




Forms 1-5

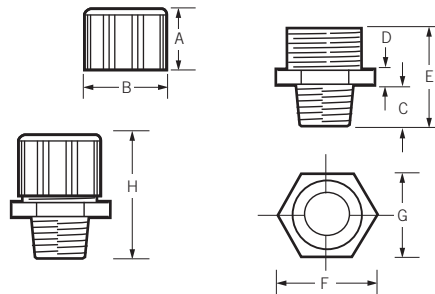

Dimensions for Nylon Cord-Sealing Fittings, 90° Body

Form	NPT	A	B	C	D	E	F	G	H (Ref.)
1	3/8"	1.000	1.150	1.100	.187	1.812	.450	1.687	2.35
2	1/2"	1.000	1.300	1.165	.187	1.900	.578	1.820	2.40
3	3/4"	1.000	1.500	1.600	.187	2.421	.593	2.218	2.75
4	1"	1.000	1.850	1.850	.187	2.656	.800	2.700	3.00
5	1 1/4"	1.000	2.050	1.965	.187	2.859	.750	2.812	3.25

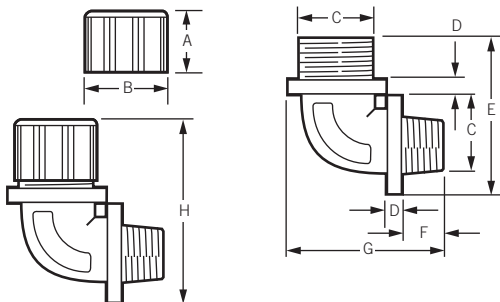

Industrial Grade

Deluxe Cord Grips

Deluxe Cord Grips are woven of stainless steel mesh with an anodized aluminum body for corrosion resistance. They are offered in Single/Double Weave construction to help absorb direct pull, resist flexing and binding, and eliminate strain. Aluminum fittings are offered in a variety of NPT thread sizes. They are recommended for indoor or outdoor use where moisture may be present in the wiring of pendant stations, processing equipment, hand tools, and extension cord sets. They are UL Listed and CSA Certified. Deluxe Cord Grips are suitable for use in hazardous locations per Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2. They are also suitable for use in wet locations as long as a listed sealing ring is used between the box and the fitting (not included).

SINGLE/DOUBLE WEAVE



L7701
Straight—Male



L7761
90°—Male



L7802
45°—Male

Cat. No. Straight Male	Cat. No. 90° Male	Cat. No. 45° Male	Cat. No. Straight Female	Cable Dia. Range (Inches)	NPT Size
L7701	—	—	—	.187-.250	3/8"
L7702	—	—	—	.250-.312	3/8"
L7703	—	—	L7822	.312-.375	3/8"
L7704	—	—	—	.375-.437	3/8"
L7705	L7761	—	—	.187-.250	1/2"
L7706	—	L7802	—	.250-.375	1/2"
L7707	L7763	L7803	L7826	.375-.500	1/2"
L7708	L7764	L7804	L7827	.500-.625	1/2"
L7709	—	—	—	.625-.750	1/2"
L7711	L7765	L7805	—	.250-.375	3/4"
L7712	—	L7806	—	.375-.500	3/4"
L7700	L7767	L7807	L7831	.500-.625	3/4"
L7713	L7768	L7808	—	.625-.750	1"
L7714	—	—	—	.750-.875	1"
L7715	L7769	—	—	.437-.562	1"
L7716	—	—	L7833	.562-.687	1"
L7717	L7772	—	L7834	.625-.750	1"
L7718	—	—	—	.750-.875	1"
L7719	—	—	L7836	.875-1.000	1"
L7721	—	—	—	1.000-1.125	1"
L7722	—	—	—	1.125-1.250	1"
L7723	—	—	—	.750-.875	1 1/4"

Cat. No. Straight Male	Cat. No. 90° Male	Cat. No. 45° Male	Cable. Dia. Range (Inches)	NPT Size
L7724	—	—	.875-1.000	
L7725	—	L7810	1.000-1.125	1 ¹ / ₄ "
L7726	L7778	—	1.125-1.250	
L7727	—	L7820	1.250-1.375	
L7728	L7781	—	.750-.875	
L7729	L7782	—	.875-1.000	
L7731	—	—	1.000-1.125	1 ¹ / ₂ "
L7732	L7784	—	1.125-1.250	
L7733	L7785	—	1.250-1.375	
L8011	—	—	1.312-1.437	
L7770	—	—	1.437-1.562	
L7750	—	—	1.562-1.687	
L7760	—	—	1.687-1.812	
L7734	—	—	1.250-1.375	
L7736	—	—	1.500-1.625	2"
L7737	L7789	—	1.625-1.750	
—	L7791	—	1.750-1.875	
L7730	—	—	2.187-2.312	
L7739	—	—	1.75-1.875	
L7742	—	—	1.937-2.062	2 ¹ / ₂ "
L7743	—	—	2.062-2.187	
L7744	—	—	2.187-2.312	
L7745	—	—	1.688-1.812	3"
L7746	—	—	1.812-1.937	
L7747	—	—	1.937-2.062	
L7748	—	—	2.062-2.187	
L7751	—	—	2.312-2.437	
L7752	—	—	2.437-2.625	
L7754	—	—	2.812-3.000	
L7755	—	—	3.000-3.250	

Industrial Grade

Liquid-Tight Grips

Liquid-Tight Grips are woven stainless steel mesh with an anodized aluminum body for corrosion-resistance. They are used to connect liquid-tight flexible metal conduit to electrical enclosures to prevent conduit pullout. Each fitting is supplied with an insulated throat to ensure conductor insulation and protect against damage caused by flexing, heat expansion or contraction. Liquid-Tight Grips are recommended in the wiring of motors and any electrical enclosure where liquid-tight conduit is subject to motion or strain. UL Listed and CSA Certified.



L7902 Straight—Male



L7922 90°—Male



L7951 Straight—Female



L7990 90°—Male



L7965 Straight—Male

LIQUID-TIGHT GRIPS


Cat. No. Straight Male	Cat. No. 90° Male	Cat. No. 45° Male	Cat. No. Straight Female	Fitting Size (Inches)	Mesh Length (Inches)
—	—	L7931	L7951	$\frac{3}{8}$	$2\frac{5}{8}$
L7902	L7916	L7932	—	$\frac{1}{2}$	$3\frac{7}{8}$
L7903	L7917	—	L7953	$\frac{3}{4}$	$4\frac{3}{8}$
L7904	L7918	—	L7954	1	$5\frac{1}{4}$
L7905	L7919	—	—	$1\frac{1}{4}$	$5\frac{5}{8}$
L7906	L7921	—	—	$1\frac{1}{2}$	$5\frac{3}{4}$
L7907	L7922	—	—	2	$7\frac{1}{2}$
L7908	—	—	—	$2\frac{1}{2}$	$9\frac{5}{8}$
L7911	L7924	L7939	—	3	$10\frac{5}{8}$
L7912	—	—	—	4	12

for Non-Metallic Type “A” Flexible Conduit


Cat. No. Straight Male	Cat. No. 90° Male	Fitting Size (Inches)	Mesh Length (Inches)
—	L7999	$\frac{3}{8}$	9
L7962	L7990	$\frac{1}{2}$	10
—	L7967	$\frac{3}{4}$	$10\frac{1}{2}$
—	L7968	1	12
L7965	L7969	$1\frac{1}{4}$	17
—	L7971	$1\frac{1}{2}$	$21\frac{1}{2}$
L7970	L7972	2	24

Connection Wire Mesh Grips

Connection Wire Mesh Grips provide additional strain-relief for plugs and connectors used on portable equipment in commercial and institutional applications, and industrial plant and construction site areas which incur abnormally high abuse. Grips are made of galvanized steel.



L8003




CONNECTION WIRE MESH GRIPS

Cat No.	Cable Dia. Range (Inches)	Eye Dimensions (A) (Inches)	Mesh Length (M) (inches)
L8001	.30-.43	$1\frac{11}{16}$	$4\frac{3}{4}$
L8002	.40-.56	$1\frac{11}{16}$	6
L8003	.52-.73	$1\frac{11}{16}$	7
L8004	.70-.85	$1\frac{15}{16}$	$8\frac{1}{2}$
L8005	.82-1.00	$1\frac{15}{16}$	$8\frac{1}{2}$
L8006	.94-1.25	$1\frac{15}{16}$	$10\frac{1}{2}$


Support Grips

Support Grips are designed to hold the weight of cable on vertical or sloping runs. They may be used indoors or outdoors to support electrical and fiber optic cable, metal rods and tubing. Leviton® Support Grips are woven with tinned bronze wire. For applications requiring a greater degree of corrosion resistance, stainless steel wire is available on special order.




SINGLE "U" EYE

For use when cable is vertical and for applications where cable bends or where a single attachment is more advantageous for positioning.



DOUBLE "U" EYE

For use when cable is vertical and extends through the grip without bending. Eyes may be fastened to open hooks, but should not be more than 15° from the axis of vertical cable. When eyes are supported equally, this attachment offers a fully balanced load.




OFFSET EYE

Similar to single eye applications, but for use when offset positioning is required.




LOCKING (UNIVERSAL) BALE

Adjustable and self-locking, this attachment fits around a beam, pipe or other continuous structural object. The bale wraps around the object and is securely anchored in the bar.





SPLIT LACE

Beginning at the lead end of the grip, thread the lacing through the first two loops of the split, pulling the lace through until the ends are centered evenly. Cross laces and thread through the next two loops, and so on down the grip, being careful not to pull the lacing too tight. The spacing of the lace closure should be approximately the same as that of the mesh weave. When the end of grip is reached, twist the lacing strands tightly together; wrap the ends of the lace around the grip and twist again to secure. Excess length may be cut off.



SPLIT ROD


Split grips with rod closing install quickly and they are economical and reusable. Simply wrap the grip around the cable and thread the rod through the loops, using a corkscrew motion. To remove, pull the rod out, and the grip is ready for re-use.



Industrial Grade

Support Grips—Standard Closed Mesh

Standard Closed Mesh Support Grips are designed for loads up to 500 lbs. and vertical runs of no more than 100 feet. Heavy-duty closed mesh support grips are designed for loads in excess of 500 lbs. They are available in a variety of eye styles and cable ranges for supporting electrical cable, metal rods and tubing. Closed mesh support grips are used when the end of the cable is accessible. Mesh is made of tinned bronze material.




L9502
Single Eye

STANDARD CLOSED MESH SERIES

Single Eye, Single Weave


Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9501	0.50-0.61	770	7	10
L9502	0.62-0.74	960	8	10
L9503	0.75-0.99	1,300	8	12
L9504	1.00-1.24	1,680	9	12
L9505	1.25-1.49	1,680	10	16
L9506	1.50-1.74	1,680	12	17
L9507	1.75-1.99	2,640	14	18
L9508	2.00-2.49	3,760	16	18
L9509	2.50-2.99	3,760	18	21
L9511	3.00-3.49	5,040	21	26
L9512	3.50-3.99	5,040	24	28



L9515
Double Eye

Double Eye, Single Weave

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9515	0.50-0.61	770	4	11
L9516	0.62-0.74	1,150	4	11
L9517	0.75-0.99	1,320	4	14
L9518	1.00-1.24	1,920	5	15
L9519	1.25-1.49	1,920	5	16
L9521	1.50-1.74	1,920	6	18
L9523	1.75-1.99	3,360	6	20
L9524	2.00-2.49	3,360	6	22
L9525	2.50-2.99	3,360	6	24
L9526	3.00-3.49	5,280	8	26
L9527	3.50-3.99	5,280	8	28



L9531
Offset Eye

Offset Eye, Single Weave


Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9531	0.50-0.61	770	4	11
L9532	0.62-0.74	960	4	11
L9533	0.75-0.99	960	4	14
L9534	1.00-1.24	1,680	5	15
L9535	1.25-1.49	1,680	5	16
L9536	1.50-1.74	1,680	5	18
L9537	1.75-1.99	2,640	6	20
L9538	2.00-2.49	3,760	6	21
L9539	2.50-2.99	3,760	8	24
L9541	3.00-3.49	5,040	9	26
L9542	3.50-3.99	5,040	9	28

NOTE: Support grips are also available in stainless steel—contact your Leviton Representative.
*To determine workload safety factor, divide approximate break strength by 10.

SUPPORT GRIPS—STANDARD CLOSED MESH

Locking Bale, Single Weave

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9551	0.50-0.61	770	11	10
L9552	0.62-0.74	1,150	11	10
L9553	0.75-0.99	1,320	14	12
L9554	1.00-1.24	1,920	15	12
L9555	1.25-1.49	1,920	16	13
L9556	1.50-1.74	1,920	18	17
L9557	1.75-1.99	3,150	20	18
L9558	2.00-2.49	3,360	21	18
L9559	2.50-2.99	3,360	24	21
L9561	3.00-3.49	5,280	26	23
L9562	3.50-3.99	5,280	28	23.5



*To determine workload safety factor, divide approximate break strength by 10.


Support Grips—Heavy Duty

Heavy Duty Support Grips handle continuous loads of over 500 lbs. in vertical runs greater than 100 ft. for cable diameters from 3/4" to 4 1/2".

DOUBLE WEAVE - CLOSED MESH SERIES

Single Eye, Heavy Long

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9701	0.75-0.99	2,700	10	26
L9702	1.00-1.24	4,720	10	29
L9703	1.25-1.49	4,720	10	31
L9704	1.50-1.99	4,720	10	35



Double Eye, Heavy Long

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9711	0.75-0.99	2,700	10	26
L9712	1.00-1.25	4,720	10	29
L9713	1.25-1.49	4,720	10	31
L9714	1.50-1.99	4,720	10	35
L9715	2.00-2.49	10,080	10	37
L9716	2.50-2.99	10,080	10	39
L9717	3.00-3.49	10,080	10	41
L9718	3.50-3.99	13,120	10	45
L9719	4.00-4.49	13,120	10	47

*To determine workload safety factor, divide approximate break strength by 10.

Industrial Grade

Support Grips—Standard Split Lace

Split Lace Support Grips are designed for loads up to 500 lbs. and vertical runs of no more than 100 feet. They are available in a variety of eye styles and cable ranges for supporting electrical cable, metal rods and tubing. Split lace grips are utilized when the end of the cable cannot be feasibly accessed and the support grip is intended for permanent installation. Mesh is made of tinned bronze material.

SINGLE WEAVE SERIES

Single Eye



L9571
Single Eye

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9571	0.50-0.61	770	7	11
L9572	0.62-0.74	960	8	11
L9573	0.75-0.99	1,320	8	14
L9574	1.00-1.24	1,680	9	15
L9575	1.25-1.49	1,680	10	16
L9576	1.50-1.74	1,680	12	18
L9577	1.75-1.99	2,640	14	20
L9578	2.00-2.49	3,760	16	22
L9579	2.50-2.99	3,760	18	24
L9581	3.00-3.49	5,040	21	26
L9582	3.50-3.99	5,040	24	28

Double Eye



L9585
Double Eye

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9585	0.50-0.61	770	4	11
L9586	0.62-0.74	1,150	4	11
L9587	0.75-0.99	1,320	4	14
L9588	1.00-1.24	1,920	5	15
L9589	1.25-1.49	1,920	5	16
L9591	1.50-1.74	1,920	5	18
L9592	1.75-1.99	3,150	6	20
L9593	2.00-2.49	3,360	6	22
L9594	2.50-2.99	3,360	6	24
L9595	3.00-3.49	5,280	8	26
L9596	3.50-3.99	5,280	8	28

Offset Eye



L9601
Offset Eye

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9601	0.50-0.61	770	4	11
L9602	0.62-0.74	960	4	11
L9603	0.75-0.99	960	4	14
L9604	1.00-1.24	1,680	5	15
L9605	1.25-1.49	1,680	5	16
L9606	1.50-1.74	1,680	5	18
L9607	1.75-1.99	2,640	8	20
L9608	2.00-2.49	3,760	8	22
L9609	2.50-2.99	3,760	8	24
L9611	3.00-3.49	5,040	9	26
L9612	3.50-3.99	5,040	9	28


Note: Support grips are also available in stainless steel—contact your Leviton Representative.
*To determine workload safety factor, divide approximate break strength by 10.

SUPPORT GRIPS—STANDARD SPLIT LACE

Locking Bale

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9621	0.50-0.61	770	18	11
L9622	0.62-0.74	1,150	18	11
L9623	0.75-0.99	1,320	18	14
L9624	1.00-1.24	1,920	18	15
L9625	1.25-1.49	1,920	18	16
L9627	1.75-1.99	3,150	18	20
L9628	2.00-2.49	3,360	18	22
L9629	2.50-2.99	3,360	18	24

*To determine workload safety factor, divide approximate break strength by 10.



L9621
Locking Bale

Support Grips—Heavy Duty Split Lace

Heavy Duty Support Grips handle continuous loads of over 500 lbs. in vertical runs greater than 100 ft. for cable diameters from $\frac{3}{4}$ " to $4\frac{1}{2}$ ".

DOUBLE WEAVE SERIES


Single Eye, Heavy Long

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9722	0.75-0.99	2,700	10	26
L9723	1.00-1.24	4,720	10	29
L9724	1.25-1.49	4,720	10	31
L9725	1.50-1.99	4,720	10	35

Double Eye, Heavy Long

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9731	0.75-0.99	2,700	10	26
L9732	1.00-1.24	4,720	10	29
L9733	1.25-1.49	4,720	10	31
L9734	1.50-1.99	4,720	10	35
L9735	2.00-2.49	10,080	10	37
L9736	2.50-2.99	10,080	10	39
L9737	3.00-3.49	10,080	10	41
L9738	3.50-3.99	13,120	10	45
L9739	4.00-4.49	13,120	10	47

*To determine workload safety factor, divide approximate break strength by 10.



L9731
Double Eye


Industrial Grade

Support Grips—Standard Split Rod

Split Rod Support Grips are designed for loads up to 500 lbs. and vertical runs of no more than 100 feet. They are available in a variety of eye styles and cable ranges for supporting electrical cable, metal rods and tubing. Split rod support grips are utilized when the end of the cable cannot be feasibly accessed and the installation is temporary.


SINGLE WEAVE SERIES

Single Eye



L9632
Single Eye

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9631	0.50-0.61	770	7	9
L9632	0.62-0.74	960	8	9
L9633	0.75-0.99	1,320	8	11
L9634	1.00-1.24	1,680	9	13
L9635	1.25-1.49	1,680	10	15
L9636	1.50-1.74	1,680	12	16
L9637	1.75-1.99	2,640	14	17
L9638	2.00-2.49	3,760	16	20
L9639	2.50-2.99	3,760	18	22
L9641	3.00-3.49	6,560	21	24
L9642	3.50-3.99	6,560	24	26



L9651
Double Eye

Double Eye

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9651	0.50-0.61	770	4	9
L9652	0.62-0.74	1,150	4	9
L9653	0.75-0.99	1,320	4	11
L9654	1.00-1.24	1,920	5	13
L9655	1.25-1.49	1,920	5	15
L9656	1.50-1.74	1,920	5	16
L9657	1.75-1.99	3,150	6	17
L9658	2.00-2.49	3,360	6	20
L9659	2.50-2.99	3,360	6	22
L9661	3.00-3.49	7,520	8	24
L9662	3.50-3.99	7,520	8	26



L9671
Offset Eye

Offset Eye

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9671	0.50-0.61	770	4	9
L9672	0.62-0.74	960	4	9
L9673	0.75-0.99	960	4	11
L9674	1.00-1.24	1,680	5	13
L9675	1.25-1.49	1,680	5	15
L9676	1.50-1.74	1,680	5	16
L9677	1.75-1.99	2,640	6	17
L9678	2.00-2.49	3,760	6	20
L9679	2.50-2.99	3,760	6	22
L9681	3.00-3.49	5,040	8	24
L9682	3.50-3.99	5,040	8	26

*To determine workload safety factor, divide approximate break strength by 10.

SUPPORT GRIPS - STANDARD SPLIT ROD - SINGLE WEAVE SERIES

Locking Bale

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L9688	0.50-0.61	770	10	9
L9689	0.62-0.74	1,150	10	9
L9691	0.75-0.99	1,320	10	11
L9692	1.00-1.24	1,920	14	13
L9693	1.25-1.49	1,920	14	15
L9694	1.50-1.74	1,920	14	16
L9695	1.75-1.99	3,150	14	17
L9696	2.00-2.49	3,360	18	20
L9697	2.50-2.99	3,360	18	22
L9698	3.00-3.49	7,520	18	24
L9699	3.50-3.99	7,520	18	26



L9689
Locking Bale

*To determine workload safety factor, divide approximate break strength by 10.

Support Grips—Bus-Drop

Bus-Drop Grips are used as cable support. They relieve any direct tension from the critical connection and absorb vibration and flexing. Bus-Drop Grips are woven of galvanized steel wire. They are offered with either locking bale or single eye attachments.

LOCKING BALE & SINGLE EYE

Cat. No. Single "U" Eye	Cat. No. Locking Bale	Cable Dia. Range (Inches)	Approx. Break Strength*
L7981	—	.220-.320	1,100
L7982	—	.300-.430	1,100
L7983	L7992	.410-.560	1,100
L7984	L7993	.530-.730	1,100
L7985	L7994	.700-.850	1,900
L7986	L7995	.820-1.00	1,900
L7987	—	.960-1.25	1,900



L7984
Single "U" Eye



L7992
Locking Bale

Support Grips—Bus-Drop Accessories

Safety Springs are used with Bus-Drop Grips to relieve sudden strains on the cable system. To use with single eye-type grips, disassemble drawbar from coil, place through the eye and replace the drawbar.

SAFETY SPRINGS

Description	Cat. No.	Length (Inches)
Zinc Plated Max. Load 40 Lbs.	L7997	7.50
Zinc Plated Max. Load 80 Lbs.	L7998	8.50



L7998
Safety Spring


Industrial Grade

Support Grips—Fiber Optic Grips

All Leviton® Fiber Optic Support Grips are designed to wrap securely around fiber optic cable without damaging it. They are designed to reduce stress on cable in vertical, sloping, or horizontal positions. Single-eye or locking-bale style grips afford lasting support for a wide variety of applications where fiber optic cable is used.

FIBER OPTIC - SINGLE WEAVE SERIES


Single Eye, Closed Mesh



L8807
Single Eye—closed mesh

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L8807	.18-.25	300	3	1.7
L8808	.23-.32	300	3	2.5
L8809	.30-.39	300	4	2.5
L8811	.37-.48	300	5	4
L8812	.46-.58	400	6	4
L8813	.56-.71	600	7	5.5
L8814	.69-.88	800	8	6


Single Eye, Split Rod



L8821
Single Eye—split rod

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L8815	.18-.25	300	3	2.5
L8816	.23-.32	300	3	2.5
L8817	.30-.39	300	4	2.5
L8818	.37-.48	300	5	4
L8819	.46-.58	400	6	5
L8821	.56-.71	600	7	5
L8822	.69-.88	800	8	6

Locking Bale, Closed Mesh



L8823
Locking Bale

Cat. No.	Cable Dia. Range (Inches)	Approx. Break Strength*	Length (Inches) Bale (Dim. A)	Length (Inches) Mesh (Dim. M)
L8823	.18-.25	300	9	2.5
L8824	.23-.36	300	9	2
L8825	.30-.39	300	9	2.5
L8826	.37-.48	300	10	4
L8827	.46-.58	400	10	4
L8828	.56-.71	600	10	5.5
L8829	.69-.88	800	10	6

*To determine workload safety factor, divide approximate break strength by 10.