

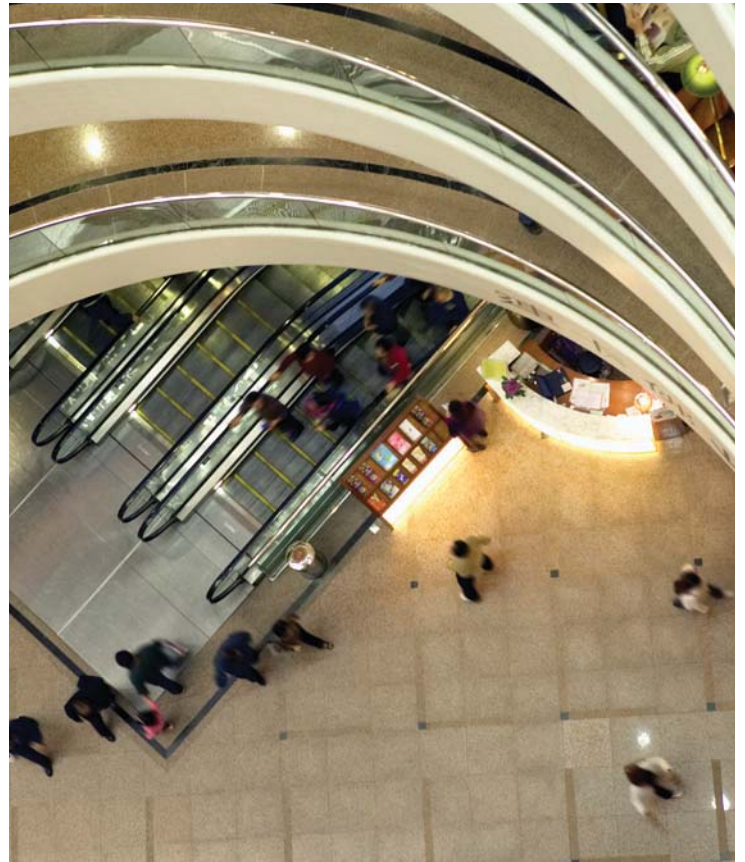


# Smart Products. Ingenious Solutions.

Wiring Devices, Energy Management  
Solutions and Commercial Data  
Infrastructure Products

L-200

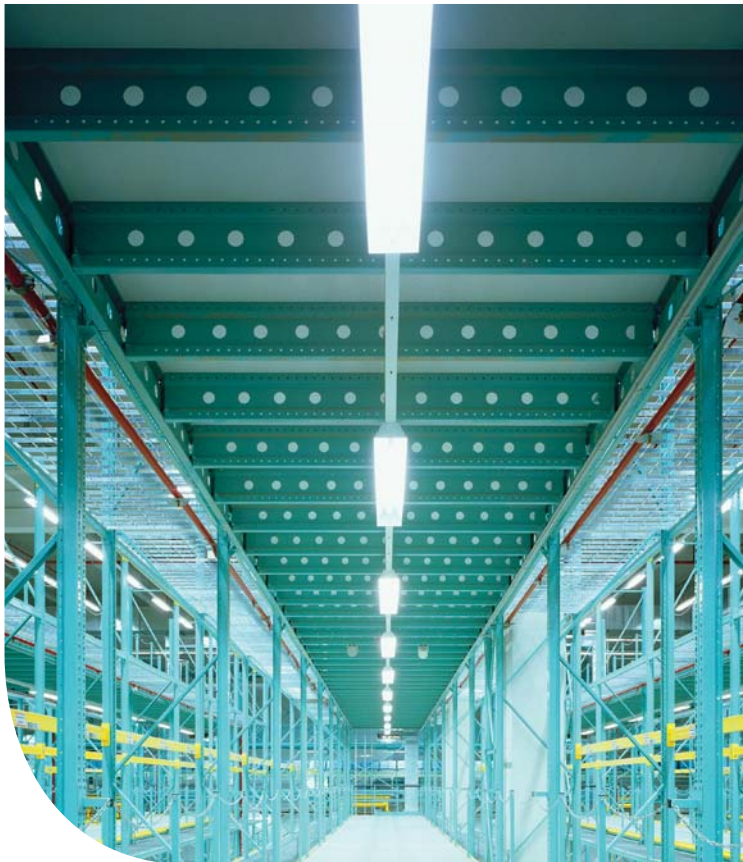

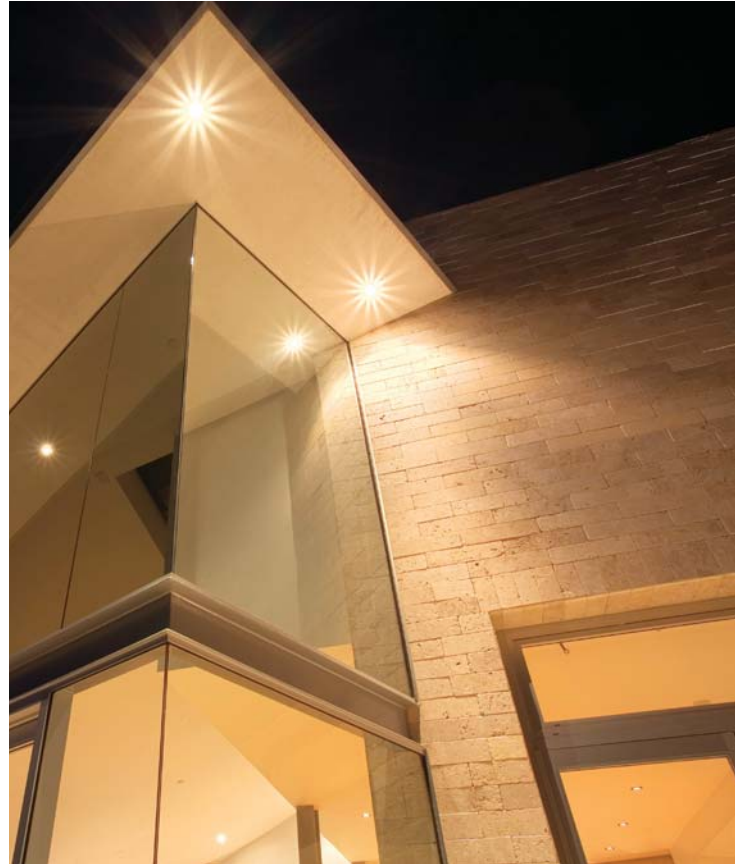

## Combination Devices

### INDEX

#### Commercial Grade

Decora® .....	30
Traditional .....	34

#### Residential Grade

Decora® LED Sensor Guide Lights .....	37
---------------------------------------	----

## Combination Devices

With Leviton's extensive assortment of combination devices, you can fill a one-gang space with two switches, a switch and receptacle, a switch and pilot light, three rocker switches — even a single pole switch and a SmartlockPro® GFCI outlet.



## Decora®

Part of Leviton's celebrated designer collection, Decora Combination Devices offer switch/switch, switch/receptacle and switch/pilot light pairings in sleek packages suitable for the finest interiors. For the ultimate in convenience and safety, the Decora Combination Switch/SmartlockPro GFCI Receptacles pair a single pole switch with a GFCI receptacle equipped with Leviton's pioneering true dead-face design.

## COLORS

Decora devices are offered in a wide range of colors and finishes. To order colors, add suffix to Cat No.



**Specifications and Features**

- Elegant Decora® styling provides multiple control in a single-gang wallbox
- Impact-resistant thermoplastic and double-wipe contacts
- Common shunted internally to all switches
- Limited Two-Year Warranty

**Tamper Resistant Receptacles**

- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure hairpins, keys, etc., will be locked out
- TR symbol on residential receptacles assures they meet the 2008 NEC requirement
- Heavy-duty construction offers long, trouble-free service life

**All SmartlockPro® Combination Devices**

- TEST/RESET buttons match device color
- Dual function LED indicator light – provides indication of wiring error and power availability



**SmartlockPro GFCI/Sensor Guide Light**


- Manual control of sensor light using the TEST/RESET buttons
- Long-lasting, energy efficient LEDs with 20-year life expectancy — no bulbs to replace
- Light sensor provides automatic ON/OFF features

**SmartlockPro GFCI/Switch**


- Replaces standard switch/outlet combination devices in residential or light commercial installations
- Permits multiple wiring options that allow for GFCI protection of switched load and downstream receptacles

**DECORA COMBINATION DEVICES\*  **

Description	Color	Cat No.	Cat. No.
<b>NEMA</b>			
		5-15R	5-20R
<b>Rating</b>		<b>Switch: 15A-120VAC</b> <b>Receptacle: 15A-125V</b>	
Single Pole Switch/ Tamper-Resistant Receptacle	White Ivory Almond Light Almond Grey Brown	T5625-W T5625-I T5625-A T5625-T T5625-GY T5625-E	
Single Pole Switch/Receptacle	White Ivory Almond Light Almond Grey Black	5625-W 5625-I 5625-A 5625-T 5625-GY 5625-E	5636-W 5636-I 5636-A — — —
<b>Rating</b>		<b>Switch: 15A-120VAC</b> <b>Pilot Light: 1/25W-125VAC</b>	<b>Switch: 20A-120VAC</b> <b>Pilot Light: 1/25W-125VAC</b>
Single Pole Switch/Pilot Light	White Ivory Almond	5626-W 5626-I 5626-A	5637-W 5637-I 5637-A

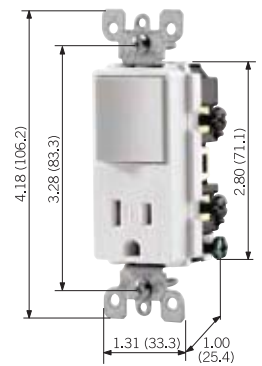

T5625-W

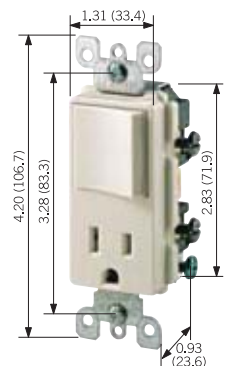


5625-W

Continued On Next Page >

## Commercial Grade


Continued From Previous Page >

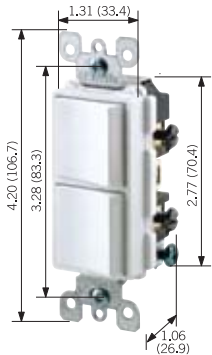

5634-W

Description	Color	Cat No.	Cat. No.
<b>NEMA</b>			
		5-15R	5-20R
<b>Rating</b>		<b>15A-120/277VAC</b>	<b>20A-120/277VAC</b>
Two Single Pole Switches	White	5634-W	5627-W
	Ivory	5634-I	5627-I
	Almond	5634-A	5627-A
	Light Almond	5634-T	5627-T
	Grey	5634-GY	—
	Black	5634-E	—
	Brown	5634	—
<b>Rating</b>		<b>15A-120/277VAC</b>	
3-Way Switch/ Single Pole Switch	White	5641-W	
	Ivory	5641-I	
	Almond	5641-A	
	Light Almond	5641-T	
	Black	5641-E	
Two 3-Way Switches	White	5643-W	5640-W
	Ivory	5643-I	5640-I
	Almond	5643-A	5640-A
	Light Almond	5643-T	5640-T
<b>Rating</b>		<b>Switch: 15A-120VAC</b>	
		<b>Receptacle: 15A-125V</b>	
3-Way Switch/ Receptacle	White	5645-W	
	Ivory	5645-I	
	Almond	5645-A	
	Light Almond	5645-T	
	Black	5645-E	

\*All with ground screw



7299-W

Description	Color	Cat No.
<b>Rating</b>		<b>Receptacle 15A-125V</b>
		<b>Feed-through: 20A-125V</b>
		<b>Switch Rating: 15A,</b>
		<b>1800W @ 120VAC</b>
Single Pole Switch and Tamper Resistant SmartlockPro® GFCI-Protected Receptacle with Indicator Light	White	T7299-W
	Ivory	T7299-I
	Almond	T7299-A
	Light Almond	T7299-T
Single Pole Switch and SmartlockPro GFCI-Protected Receptacle with Indicator Light	White	7299-W
	Ivory	7299-I
	Almond	7299-A
	Light Almond	7299-T


Description	Color	Cat No.
<b>Rating</b>		<b>Receptacle 15A-125V Feed-through: 20A-125V</b>
Automatic ON/OFF Sensor	White	T7591-W
LED Guidelight and Tamper Resistant	Ivory	T7591-I
SmartlockPro® GFCI-Protected	Almond	T7591-A
Receptacle with Indicator Light	Light Almond	T7591-T
<b>Rating</b>		<b>Receptacle 15A-125V Feed-through: 20A-125V</b>
Automatic ON/OFF Sensor	White	7591-W
LED Guidelight and SmartlockPro	Ivory	7591-I
GFCI-Protected Receptacle	Almond	7591-A
with Indicator Light	Light Almond	7591-T



7591-W

### DECORA® COMBINATION SWITCHES†

Description	Color	Cat No. non-grounded	Cat. No. with ground screw
<b>Rating</b>		<b>Individual Switches: 15A-120V Device Total: 20A-120V</b>	<b>Individual Switches: 15A-120V Device Total: 20A-120V</b>
Dual Rockers	White	1754-W	1754-2W
	Ivory	1754-I	—
	Almond	1754-A	—
	Light Almond	1754-T	—
Illuminated	White	1754-ILW	—
Dual Rockers	Ivory	1754-ILI	—
(Light is ON when top rocker is OFF)	Almond	1754-LIA	—
Three Rockers	White	1755-W	1755-2W
	Ivory	1755-I	1755-2I
	Almond	1755-A	—
	Light Almond	1755-T	—



1755-W

†Warning: Although each individual rocker switch is rated up to 15A-120V, the total combined load for both duplex or all three triplex switches must not exceed 20 AMPS.

#### TESTING AND CODE COMPLIANCE

##### Decora Combination Switches

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)

##### Switch/SmartlockPro GFCI Receptacle

- Meets or exceeds all new UL requirements for July 28, 2006
- UL Standard 943 Class A (GFCI) and 498 (Receptacles), 20 (Switches)
- UL Listed (File # E-48380)
- CSA Certified (File #LR-57811)
- NOM Certified (File #057)

#### MATERIAL CHARACTERISTICS

##### Decora Combination Switches

Environmental: Flammability UL-94, V2 Rating  
Operating Temperature: -40°C to 120°C

##### Switch/SmartlockPro GFCI Receptacle

Environmental: Flammability UL-94 V2 Rating  
Operating Temperature: -35°C to 65°C

## Commercial Grade

### Traditional



Leviton's Combination Devices offer pleasing, practical designs that fit standard wallboxes. Switch/switch, switch/receptacle and switch/pilot light combinations are available. These devices come in a range of colors and are backed by a limited two-year warranty.

#### Specifications and Features

- AC quiet switches have silver-cadmium oxide contacts and receptacles have double-wire contacts for maximum conductivity
- All devices have a grounding screw, except where noted
- Terminal screws accept up to No. 12 AWG copper or copper-clad wire
- Fits standard wallboxes
- Break-off tabs on devices with switches permit conversion to separate feeds
- Limited Two-Year Warranty



#### Tamper Resistant Receptacles

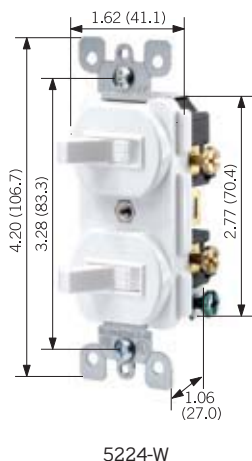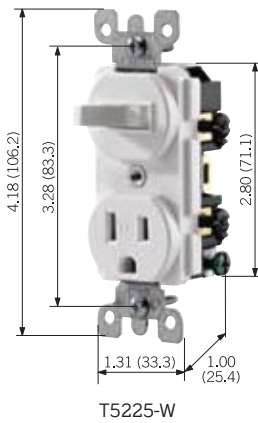
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure hairpins, keys, etc., will be locked out
- TR symbol on residential receptacles assures they meet the 2008 NEC requirement
- Heavy-duty construction offers long, trouble-free service life



### COMBINATION DEVICES

Description	Color	Cat No.	Cat. No.
<b>NEMA</b>		5-15R	5-20R
<b>Rating</b>		<b>Switch: 15A-120VAC</b> <b>Receptacle: 15A-125V</b>	
Single Pole Switch/ Tamper Resistant Receptacle*	White Ivory Almond Light Almond Brown	T5225-W T5225-I T5225-A T5225-T T5225	
<b>Rating</b>		<b>Switch: 15A-120VAC</b> <b>Receptacle: 15A-125V</b>	<b>Switch: 20A-120VAC</b> <b>Receptacle: 20A-125V</b>
Single Pole Switch/Receptacle*	White Ivory Almond Light Almond Black Brown	5225-W 5225-I 5225-A 5225-T — 5225	5335-W 5335-I — — 5335-E 5335
<b>Rating</b>		<b>15A-120/277VAC</b>	
Two Single Pole Switches, non-ground	White Ivory Brown	5224-W 5224-I 5224	
<b>Rating</b>		<b>15A-120/277VAC</b>	<b>20A-120/277VAC</b>
Two Single Pole Switches, with ground screw	White Ivory Almond Light Almond Brown	5224-2W 5224-2I 5224-2A 5224-2T 5224	5334-W 5334-I — — 5334

Description	Color	Cat No.	Cat. No.
<b>NEMA</b>		 5-15R	 5-20R
<b>Rating</b>		<b>Switch: 15A-120VAC</b> <b>Pilot Light:</b> <b>1/25W-125VAC</b>	<b>Switch: 20A-120VAC</b> <b>Pilot Light:</b> <b>1/25W-125VAC</b>
Single Pole Switch/Pilot Light*	White	5226-W	—
	Ivory	5226-I	5336-I
	Almond	5226-A	—
	Light Almond	5226-T	—
	Brown	5226	5336
<b>Rating</b>		<b>15A-120/277VAC</b>	
3-Way Switch/Single Pole Switch *	White	5241-W	—
	Ivory	5241-I	—
	Almond	5241-A	—
	Light Almond	5241-T	—
	Brown	5241	—
<b>Rating</b>		<b>15A-120/277VAC</b>	
Two 3-Way Switches*	White	5243-W	—
	Ivory	5243-I	—
	Almond	5243-A	—
	Light Almond	5243-T	—
	Brown	5243	—
<b>Rating</b>		<b>Switch: 15A-120/277VAC</b> <b>Receptacle: 15A-125V</b>	
3-Way Switch/Receptacle*	White	5245-W	—
	Ivory	5245-I	—
	Brown	5245	—

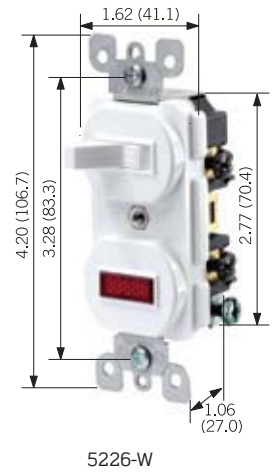

\*With ground screw

**TESTING AND CODE COMPLIANCE**

- UL Listed (File #E-7458)
- CSA Certified (File #LR-3413)
- NOM Certified (#057)

**HORSEPOWER**


15A — 1/2 @ 120V, 2 @ 240V  
20A — 1 @ 120V, 2 @ 240V

**MATERIAL CHARACTERISTICS**


Environmental: Flammability UL-94, V2 Rating  
Operating Temperature: -40°C to 120°C

## Commercial Grade


### DIMENSIONS

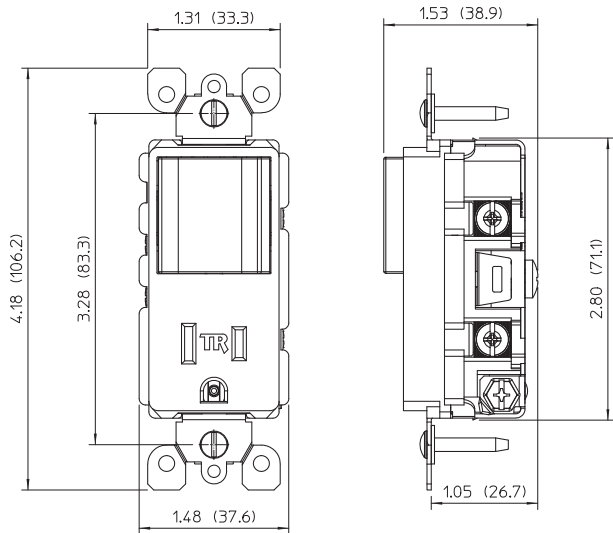


T5625 — Decora® Tamper Resistant Combination Switch/Receptacle

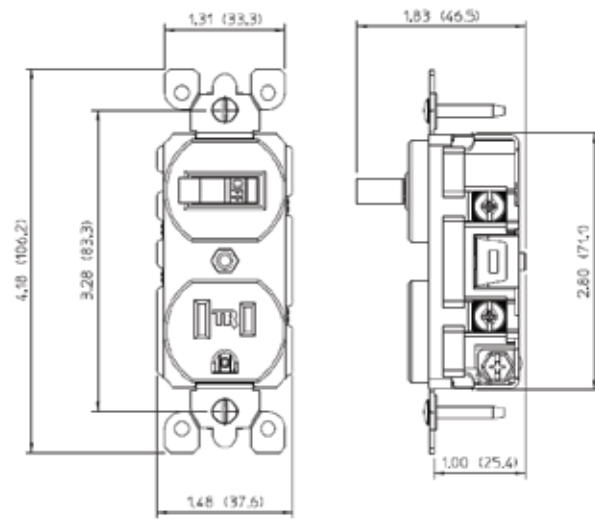

T5225 — Traditional Tamper Resistant Combination Switch/Receptacle

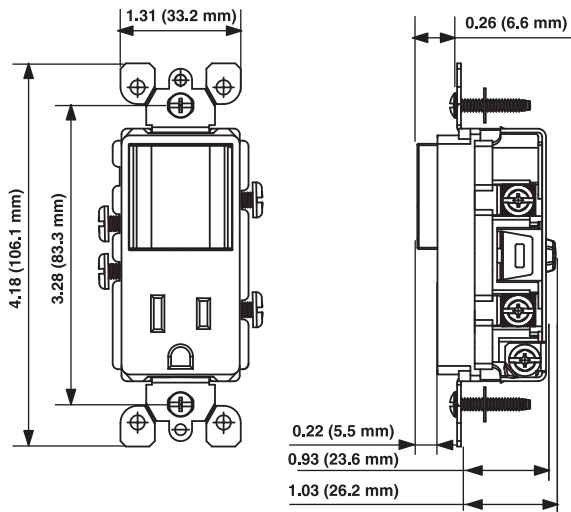

5625 — Decora® Combination Switch/Receptacle

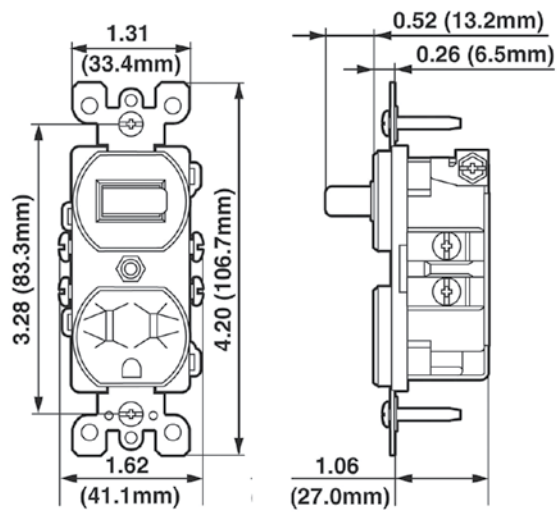

5225 — Traditional Combination Switch/Receptacle

### Decora® LED Sensor Guide Lights

Our new LED Sensor Guide Light Series unites Leviton's quality Decora wiring devices with energy-saving LED Guide Lights for a smart combination. The Sensor LEDs turn ON and OFF automatically in Switch/Guide Light or Tamper-resistant Receptacle/Guide Light combinations, as well as a full LED Guide Light version that's perfect for hallways or stairways.

#### Specifications and Features

##### All Devices

- Impact-resistant face and body
- Long-lasting energy-efficient LED with long life expectancy — no bulbs to replace
- Light sensor provides automatic ON/OFF features
- All devices have a self grounding clip
- Fits standard wall boxes
- Back or side wired

##### Tamper Resistant Receptacle/Guide Light

- Uses two LEDs
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure foreign objects will be locked out
- Complies with section 406.11 of the 2008 NEC Code

##### Combination Switch/Guide Light

- Uses two LEDs
- Single Pole
- Neutral Required

##### Full LED Guide Light

- Uses three LEDs
- Color Change Kits available for select models

### COLORS

Decora devices are offered in a wide range of colors and finishes. To order colors, add suffix to Cat No.



White  
(-W)



Ivory  
(-I)




Almond  
(-A)




Light Almond  
(-T)

## Residential Grade

### DECORA® COMBINATION DEVICES\*

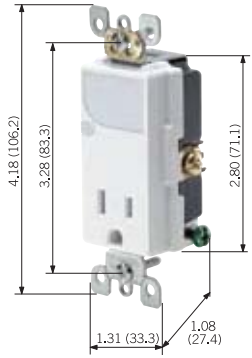

T6525

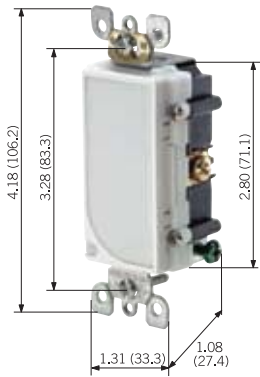

6527

Description	Color	Cat No.
<b>NEMA</b>		5-15R
<b>Rating</b>		<b>15A-125VAC</b>
Decora Tamper Resistant Receptacle/LED Guide Light	White	T6525-W
	Ivory	T6525-I
	Almond	T6525-A
	Light Almond	T6525-T
<b>Rating</b>		<b>15A-125VAC</b>
Decora Single Pole Switch/LED Guide Light	White	6526-W
	Ivory	6526-I
	Almond	6526-A
	Light Almond	6526-T
<b>Rating</b>		<b>1W-120VAC</b>
Decora Full LED Guide Light	White	6527-W
	Ivory	6527-I
	Almond	6527-A
	Light Almond	6527-T

#### TESTING AND CODE COMPLIANCE

- UL Listed (File #E-7458)
- CSA Certified (File #LR-341.3)
- NOM Certified (#057)


#### MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating  
Operating Temperature: -40°C to 120°C



#### HORSEPOWER

- 15A — 1/2 @ 120V

## DIMENSIONS

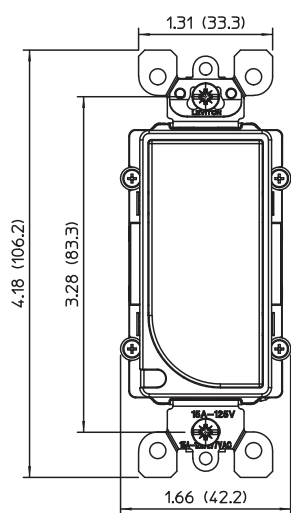

Decora 6527  
Full LED Guidelight

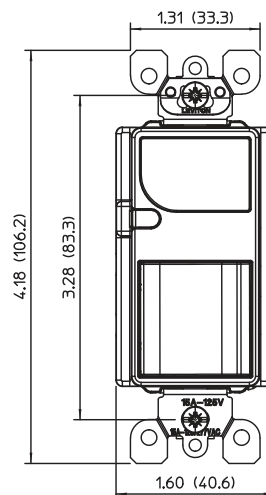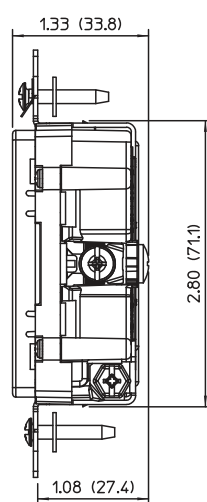

Decora 6526  
Switch LED Guidelight

