

The Programmable Information Terminal Eases Your Work for Information Exchange between Production Lines and Management Offices



Standard Model

IT2400 Type A / IT2400 Type A200
(Model No. : IT2400-TC41-GP / IT2400-TC41-GP200V)


I/O Connection Model

IT2400 Type B / IT2400 Type B200
(Model No. : IT2400-TC41-GLC / IT2400-TC41-GLC200V)


**7.4-inch
TFT Color**
640 x 480 pixels

Example of Installation Result

Before Installation

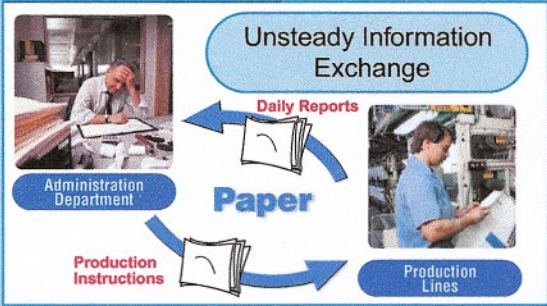

After Installation

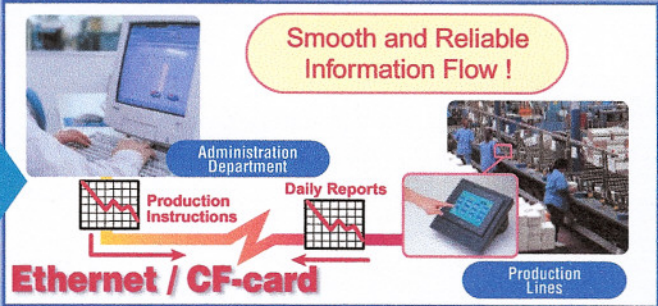

Benefits

- Real-time data exchange over an Ethernet network
- Periodic data exchange via a CF-card
- Wide connectivity with PC applications, using DDE, DLL, OPC, ADO and SQL

Five Important Features to Support Your Applications

- 1 World's most popular operator interfaces
- 2 Easy touch-panel operation over graphic displays
- 3 Easy connection with variety of industrial controllers
- 4 Easy exchange of data with popular applications like Excel and Access
- 5 Easy maintenance with program-less screen creation



IT2400
Pro-face

Production Information Terminals IT2400


System Structure (Sample)

Required Software

<OS>
Windows® 95 / 98 / 2000, Windows NT®
<Screen Editor Software>
GP-PRO/PB II for Windows Ver.5.0
<Data Collection Software>
Pro-Server with Pro-Studio Ver.3.0
<Logic Program Development Software>
Pro-Control Editor Ver.3.0*
* Required only for the IT2400 Type B.

Data Collection Server

Windows PC
(commercially available product)




Required Software

<OS>
Windows NT® Server (SP 4.0 or greater)
Windows® 2000 Professional/Server
<Web Operation Software>
GP-Web Ver.1.0
* For more information, please consult our sales staff or Pro-face distributors.

GP-Web Server

Windows PC
(commercially available product)





Required Software

<Internet Browser>
Internet Explorer 5.0 or greater

GP-Web Client


Windows PC
(commercially available product)

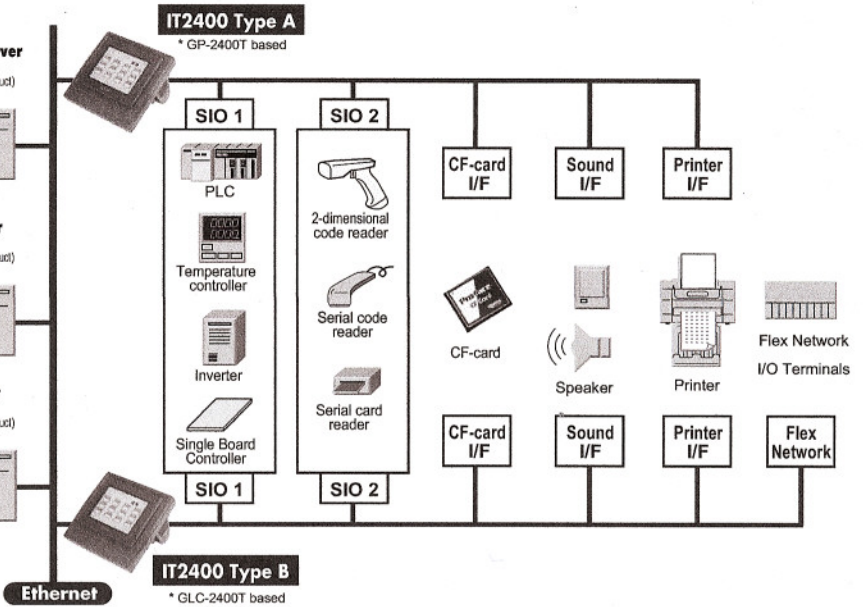

Functional Specifications (Type A and B)

Model	Specifications	
	IT2400-TC41-GP	IT2400-TC41-GP200V
Main parts	IT2400-TC41-GLC	IT2400-TC41-GLC200V
Input Voltage	AC100V	AC100-240V
Power Cable	Length 2m	
Power Socket	A Plug (3-P)	B Plug (with 2-pole ground)
Weight	Approx. 3.0kg [6.6lb]	

Dimensions (Type A and B)

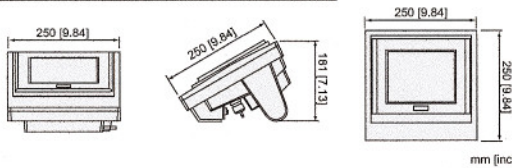

Line-up

Line-up

	Item	Model No.	Description
Hardware	IT2400 Type A	IT2400-TC41-GP	AC100V Input with A Plug
	IT2400 Type B	IT2400-TC41-GLC	
	IT2400 Type A200	IT2400-TC41-GP200V	AC100-240V Input with B Plug
Software	IT2400 Type B200	IT2400-TC41-GLC200V	
	GP-PRO/PB II for Windows Ver.5.0	GPW-PB01W-V50	Screen Editor Software for GP and GLC
	GP-Web Ver.1.0	GW-CJ01-V10	Screen Data Compiler and GP-Web Server
	Pro-Server with Pro-Studio Ver.3.0	PSW-ED01-V30	Data Collection Software
Options	Pro-Control Editor Ver.3.0	GLCCNT-ED01W-V30	Logic Program Development Software
	Screen protection sheet	PS400-DF00	Protects the screen from fingerprints, dust, etc.
	CF-card	GP077-CF10	CF-card (8 MB)
		GP077-CF20	CF-card (16 MB)
		GP077-CF30	CF-card (32 MB)
	CF-card Adapter	GP077-CFAD10	CF-card Adapter for PCMCIA Type II Slot
	Printer Cable	PSM-PRCB00	Printer Connection Cable

Specifications

- For the specifications of the IT2400 Type A, please refer to the GP2000 series catalog or manual.
- For the specifications of the IT2400 Type B, please refer to the GLC2400 catalog or manual.

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- Microsoft Windows® 95/98, Windows NT® and Windows® 2000 are registered trademarks of the Microsoft Corporation.
- Microsoft® Word, Excel and Access are registered trademarks of the Microsoft Corporation.
- All product names used in this catalog are the registered trademarks of their respective companies.
- Due to printing limitations, the colors in this catalog may differ from those of the actual unit.
- All information contained in this catalog is subject to change without notice.

ACCESS!! www.pro-face.com

Worldwide Contacts:
info@pro-face.com for General Sales Inquiries
support@digital.co.jp for Technical Inquiries
or any of the addresses stated below.

© Copyright 2000-2001 Digital Electronics Corporation All rights reserved.

Global Head Office

Digital Electronics Corporation
8-2-52 Nanko-higashi
Suminoe-ku, Osaka 559-0031
JAPAN
Tel: +81 (0)6 6613 3116
Tel: +81 (0)6 6613 5888
http://www.pro-face.com
info@pro-face.com

South Korea

Pro-face Korea Co., Ltd.
Room #701, Jaeyoung Building
678-10 Deungchon-dong
Kangseo-ku, Seoul 157-030
KOREA
Tel: +82 (0)2 658 6835
Tel: +82 (0)2 3664 6839
http://www.proface.co.kr
proface@proface.co.kr

Taiwan

Pro-face Taiwan Co., Ltd.
2F, No. 69 Fushing North Road
Taipei 105
TAIWAN R.O.C.
Tel: +886 (0)2 2772 5208
Tel: +886 (0)2 8773 7892
http://www.proface.com.tw
proface@proface.com.tw

North/South America

Pro-face America, Inc.
2190-E Gladstone Court
Glendale Heights, IL 60139
U.S.A.
Tel: +1 630 351 1101
Tel: +1 630 351 1102
http://www.profaceamerica.com
sales.info@profaceamerica.com

European Head Office

Pro-face HMI B.V.
Amsteldijk 166
1079 LH Amsterdam
THE NETHERLANDS
Tel: +31 (0)20 6464 134
Tel: +31 (0)20 6464 358
http://www.proface.com
info@proface.com

France

Pro-face France S.A.S.
Le Vinci
1, rue Henri Becquerel
77290 Milry-Mory
FRANCE
Tel: +33 (0)1 60 21 22 91
Tel: +33 (0)1 60 21 22 92

Germany

Pro-face Deutschland GmbH
Albertus-Magnus-Straße 11
42719 Solingen
GERMANY
Tel: +49 (0)212 258 260
Tel: +49 (0)212 258 2640
http://www.pro-face.de
sales@pro-face.de

Italy

Pro-face HMI B.V. Italia
Via Carcano 44
20033 Desio (MI)
ITALY
Tel: +39 0362 33 71 63
Tel: +39 0362 30 77 25
info.italia@proface.com

Scandinavia

Pro-face HMI B.V. Scandinavia
Danmarksvej 30 L1
8660 Skanderborg
DENMARK
Tel: +45 70 22 0122
Tel: +45 70 22 0133
info.scandinavia@proface.com

United Kingdom

Pro-face UK, Ltd.
The Venture Centre,
The Science Park,
Coventry CV4 7EZ
ENGLAND
Tel: +44 (0)2476 602363
Tel: +44 (0)2476 602365
proface.uk@btinternet.com